



Contents

01-08

Foroll Furniture Castor

HH series	02
HPH series	02
HS series	03
HPS series	03
UH series	05
US series	05
UPH series	05
Fitting	06
RB series	06
ZB series	07
LU series	07
BX series	07
WB series	08

09-10

Foroll Chair Castor

CH series	10
CS series	10

11-53

Foroll Apparatus Castor

EAA series	12
EAR series	13
EAT series	14
LAA series	15
LAR series	18
LARB series	21
LAT series	24
LATB series	27
LAU series	30
LAK series	33
BLAA series	34
BLAR series	35
BLAT series	36
BLATBseries	37
BLAU series	38
BLAK series	39
WLAA series	40
WLAT series	41
WLAK series	42
DAA series	43
DAR series	44
DARB series	45
DAT series	46
DATB series	47
DAU series	48

HAA series	49
HAE series	50
HAT series	51
HATB series	52
HAUB series	53

55-57

Foroll Shopping Trolley and Walkway Castor

MT series	56
MS series	56
BT series	57
BS series	57

59-66

Foroll Medical Castor

BG series	60
NB series	60
CL series	61,62
CLC series	63
CLCD series	64
TF series	65
PL series	66
DP series	66

67-76

Foroll Industrial Castor

CR series	68
GF series	69
RSA series	70
RSAR series	71
RSH series	72
RSP series	73
RSPR series	74
RSE series	75
RSL series	76

77-82

Foroll Heavy Duty Castor

SHC series	78
SHR series	79
SHP series	80
SHUP series	81
SHUI series	82

83-84

OEM

All and all illustrations, drawings, dimensions, etc. in this catalogue are subject to changes and are therefore non-binding.



Foroll *We make things for roll*
Castors & Wheels Foroll, you reliable supplier in castors & wheels!


Company Profile

Foroll Industrial (Jiaxing) Co., Ltd. is a specialized manufacturer of all kinds of castors and wheels. With the production area of 20,000 square meters we have a capacity of more than a million pieces per month. Being close to Shanghai, we are enjoying convenient transportation.

Foroll manufacture and export castors and wheels in a wide range from plastic furniture castors to metal industrial castors with the best technology, beautiful in shape, convenient and safe in use. All of our products are widely used for furniture, apparatus, hospital, transportation, material handling, heavy duty industry and special occasions. With more than 1,000 different high quality caster combinations, Foroll can provide castors and wheels for nearly every mobility purpose. Most of our products are made for export, mainly to Europe, Australia and Japan.

Relying on quality products, timely service and competitive prices, Foroll is an organization of professionals dedicated and committed to one goal: meeting your purchasing satisfaction. "We make things for roll." Foroll sincerely welcomes businessmen here and abroad to visit our company and grow in our common venture together!

Foroll, your reliable supplier in castors & wheels!

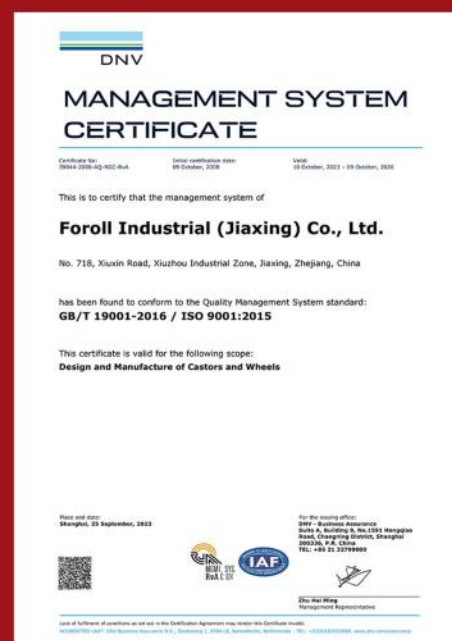



Manufacturing

Foroll produces millions of castors and wheels each year, such quantities can only be realized by well organization. Our depth of knowledge in castor production allows us to keep complete process control. With our core competence of in-house tool making, we are able to stay ahead of the game. The In-house integration of all major stages in the production process with ERP system permits ongoing direct control over process quality standards and manufacture a quality product from top to bottom - meeting your need for fast delivery at a competitive price.

Thanks to the high-quality manual labour, our production staff can give rapid and flexible reaction to customer requests. This way, even orders for small batches on short notice pose no problems.



Foroll *We make things for roll*
Castors & Wheels Foroll, you reliable supplier in castors & wheels!





We make things for roll

Foroll, you reliable supplier in castors & wheels!



Quality


Quality is the life of a company. Therefore, quality control is not a passing trend for Foroll, but rather, it's tradition. Quality permeates every aspect of Foroll operations: only optimum raw materials are selected and the materials are subjected to a thorough inspection on arrival; each and every component is checked after each individual production step; each and every wheel and castor is tested to ISO 22878 ~ 22884 and EN 12527 ~ 12533 standards before leaving the factory. This is the reason why we successfully passed the strict audit by DNV in less than three months for our ISO 9001:2008 certification, and we will continue to adhere to these high standards.

Great care is also dedicated to personnel training, with periodic professional development courses to keep employees up to date on the latest developments in technology so that they will be fully qualified to make use of the most advanced production systems and information technologies, all in line with Foroll's philosophy.

Foroll
Castors & Wheels



We make things for roll
Foroll, you reliable supplier in castors & wheels!

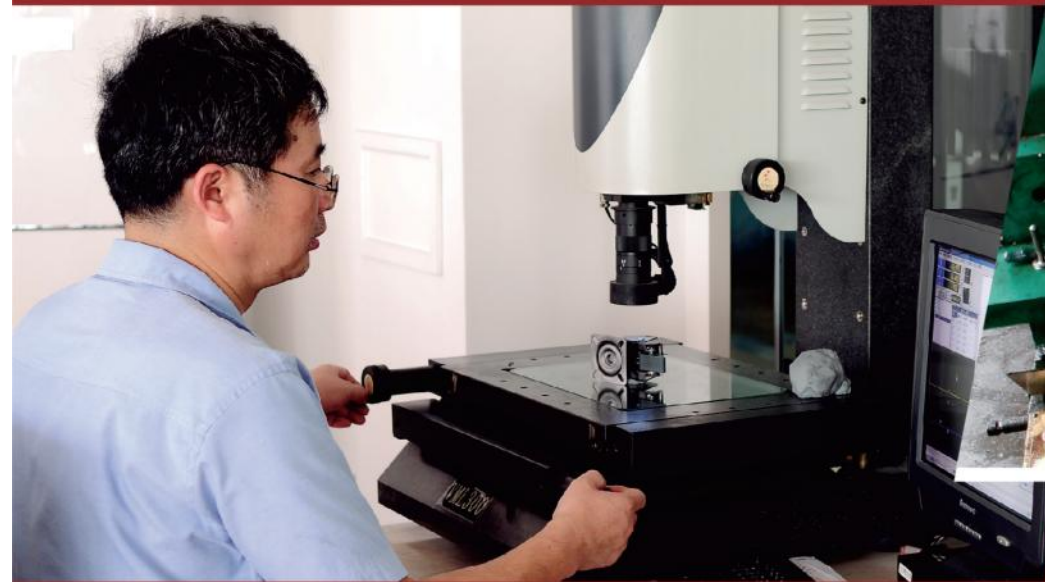


R&D

Foroll is dedicated entirely to solving customer's mobility problems, improving product design, and using innovative manufacturing methodology. Foroll uses the latest computer technologies such as CAD/CAM to develop the optimal and most efficient customized mobility solution and deliver the excellent castor performance for our customers. Utilizing our in house test facilities, Foroll is able to develop solutions under specific conditions. This ensures that Foroll products meet the high demands of customers today.

Each and every task depends entirely on the correct tool. The in-house tool production equipped with computerized machining centers and other precision processing machines ensures exact quality. The direct transmission of CAD data to our in-house tool makers guarantees quick development times. Each Foroll punching and drawing tool is a high-capacity piece of equipment, constructed and manufactured right in the heart of our plant.

Foroll article number system

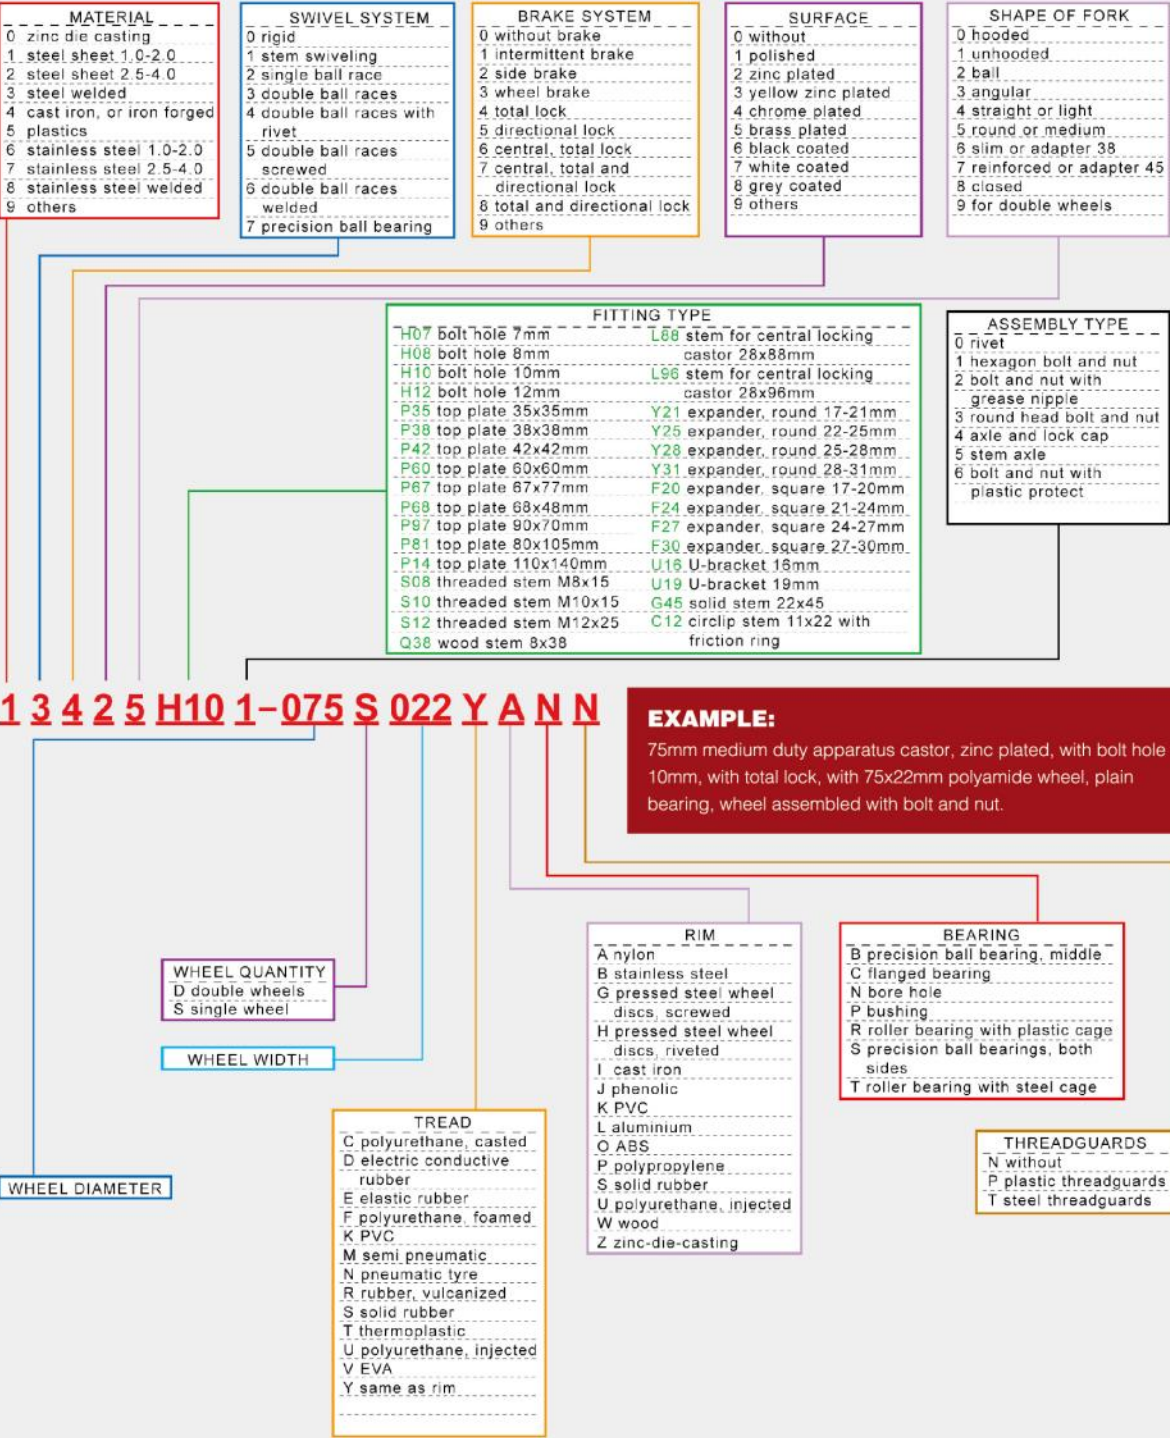

How to select the proper castor & wheel



Although there is no sample formula or rule that can be followed in selecting the proper castor or wheel, many varying and individual factors must be balanced to make the selection which will do the best job for you, the information below is intended as a guide to assist you in specifying, operating and maintaining castors for safety and maximum life.

Load weight

The heavier the load, the larger the wheel required for the castor. The weight of the load also influences the mobility of the wheel. Load capacities listed in our catalogue are dynamic or rolling load, which is the load imposed upon a castor or wheel while in use. Furthermore, one should consider the impact or shock load which is the momentary load imposed upon a castor or wheel when the load is dropped on equipment, strikes obstruction or vibrates.

Floor conditions

As a general rule, hard tread wheels perform better on soft or smooth floors and soft tread wheels roll better on hard or rough floors including outdoor surfaces. Make sure the wheel you select is large enough to pass over cracks in the floor, tracks, moldings and other obstruction. The larger and softer the wheel, the greater the ability to roll over rails and similar obstacles.

Unusual Conditions

Each wheel material has certain characteristics which will give the best results where unusual conditions exist. Be sure to consider unusual environmental conditions such as moisture, extreme heat or cold, exposures to chemicals, blood, fats, oils, salt, etc. Check conditions, then select castor and wheel.

Rollability

The larger the wheel diameter, the easier it rolls. Roller bearings carry heavier loads. Ball bearings roll easier but carry lesser loads. When possible, use the largest ball bearing wheel for best results.

Extreme Climates

Room temperatures are no problem for most castors. But extreme cold or heat will affect the performance of the castor and wheel, so special bearing lubricants are required.

Your Foroll Customer Service Team has years of hands-on experience solving castor problems in the field. If you are not absolutely certain which castor is the correct one for your use, contact us. We are eager to assist you with any castor question you may have.



Foroll Furniture castor

HH Series

Housing:

high quality polyamide, black (also available in different colours), with cover, with and without wheel brake.

Wheel:

high quality polyamide, black (also available in different colours), for soft floors.

2"/34.5							
67888:8;638@8<88=> 244#	@8#	?A=#	78#	@B#	;	3#	?8
67888:8;638@6<88=> 244#	@6#	?A=#	7756#	98#	;	3#	?6
67888:8;63898<88=> 244 #	# 98#	?A=#	7@56#	9656#	;	3#	@8
67888:8=63896<88E> 244#	96#	?AE#	79#	6756#	=#	3#	@6
67888:8=63868<87?> 244#	68#	?A7?#	7B56#	6;#	=#	3#	98
67888:8=638B8<87?> 244#	B8#	?A7?#	?7#	B656#	=#	3#	96

2"/34.5							
67@88:8;63898<88=> 244#	98#	?A=#	7@56#	9656#	;	C("0#D/%&"	@8
67@88:8=63868<87?>244	68	?A7?	7B56	6;	=	C("0#D/%&"	98
67@88:8=638B8<87?>244 #	B8#	?A7?#	?7#	B656#	=#	C("0#D/%&"	96

HPH Series

Housing:

high quality ABS, silver or gold colour cover, with and without wheel brake.

Wheel:

high quality polyamide, black, for soft floors.

Surface: silver

2"/34.5							
67898:8;63898<88=> 244#	98	?A=#	7@56#	9656#	;	#####3;#	@8
67898:8=63868<87?> 244#	68	?A7?#	7B56#	6;#	=#	#####3;#	98
67@98:8;63898<88=> 244#	98	?A=#	7@56#	9656#	;	C("0#D/%&"	@8
67@98:8=63868<87?>244#	68	?A7?#	7B56#	6;#	=#	C("0#D/%&"	98

Surface: gold

2"/34.5							
67868:8;63898<88=> 244#	98	?A=#	7@56#	9656#	;	#####3;#	@8
67868:8=63868<87?> 244#	68	?A7?#	7B56#	6;#	=#	#####3;#	98
67@68:8;63898<88=> 244#	98	?A=#	7@56#	9656#	;	C("0#D/%&"	@8
67@68:8=63868<87?>244#	68	?A7?#	7B56#	6;#	=#	C("0#D/%&"	98

HS Series

Housing:

high quality polyamide, black (also available in different colours), with cover, with and without wheel brake.

Wheel:

high quality polypropylene copolymer wheel centre, TPE tread, for hard floors.

2"/34.5							
67888:8;63898<88=IP44#	98#	?A=#	7@56#	9656#	;#	3	@8#
67888:8=63868<87?IP44#	68#	?A7?#	7B56#	6,#	=#	3	98#

2"/34.5							
67@88:8;63898<88=IP44#	98#	?A=#	7@56#	9656#	;#	C("0#D/%&"#	@8#
67@88:8=63868<87?IP44#	68#	?A7?#	7B56#	6,#	=#	C("0#D/%&"#	98#

HPS Series

Housing:

high quality ABS, silver or gold colour cover, with and without wheel brake.

Wheel:

high quality polypropylene copolymer wheel centre, TPE tread, for hard floors.

Surface: silver

2"/34.5							
67898:8;63898<88=IP44#	98#	?A=#	7@56#	9656#	;#	#####3#	@8#
67898:8=63868<87?IP44#	68#	?A7?#	7B56#	6,#	=#	#####3#	98#
67@98:8;63898<88=IP44#	98#	?A=#	7@56#	9656#	;#	C("0#D/%&"#	@8#
67@98:8=63868<87?IP44#	68#	?A7?#	7B56#	6,#	=#	C("0#D/%&"#	98#

Surface: gold

2"/34.5							
67868:8;63898<88=IP44#	98#	?A=#	7@56#	9656#	;#	#####3#	@8#
67868:8=63868<87?IP44#	68#	?A7?#	7B56#	6,#	=#	#####3#	98#
67@68:8;63898<88=IP44#	98#	?A=#	7@56#	9656#	;#	C("0#D/%&"#	@8#
67@68:8=63868<87?IP44#	68#	?A7?#	7B56#	6,#	=#	C("0#D/%&"#	98#



Foroll twin wheel castors are ANSI / BIFMA approved.
For BIFMA approved castors, please specify.

UH Series

Housing:

high quality polyamide, black (also available in different colours), without cover, with and without wheel brake.

Wheel:

high quality polyamide, black (also available in different colours), for soft floors.

2"/34.5							
67887:8;63898<878> 244#	##98#	?A78#	7?#	##9856#	;	3#	@8#
67887:8=63868<87?> 244#	##68#	?A7?#	7B#	##6856#	=	3#	98#
67887:8E638B8<87?> 244#	##B8#	?A7?#	?8#	##B6#	E	3#	96#
67887:8E638;6<876> 244	##;6#	?A76#	?6	##;=#	E	3	B8
67887:7 783788<87B>244#	788#	?A7B#	@9#	789#	77	3#	=8#
2"/34.5							
67@87:8=63868<87?>244	##68	?A7?	7B	##6856	#=	C("0#D/%&"	98
67@87:8E638;6<876>244	##;6	?A76	?6	##;=#	#E	C("0#D/%&"	B8
67@87:7783788<87B>244#	788	?A7B	@9	789	77	C("0#D/%&"#	=8#
	#	#	#	#	#		

US Series

Housing:

high quality polyamide, black (also available in different colours), without cover, with and without wheel brake.

Wheel:

high quality polypropylene copolymer wheel centre, TPE tread, for hard floors.

2"/34.5							
67887:8;63898<878IP44#	98#	?A78#	7?#	9856#	;	3#	@8#
67887:8=63868<87?IP44#	68#	?A7?#	7B#	6856#	=	3#	98#
67887:78638;6<87=IP44#	;6#	?A7=#	?9#	;E#	78#	3#	B8#
2"/34.5							
67@87:8=63868<87?IP44	68	?A7?#	7B	6856	#=	C("0#D/%&"	98#
67@87:78638;6<87=IP44	;6	?A7=#	?9	;E#	78	C("0#D/%&"	B8

UPH Series

Housing:

high quality ABS, silver colour, with and without wheel brake.

Wheel:

high quality polyamide, black, for soft floors.

2"/34.5							
67897:8;63898<87 7>244#	98#	?A7#	7?#	9856#	;	#####3#	@8#
67897:8=63868<878> 244#	68#	?A78#	7B#	6856#	=#	#####3#	98#
67@97:8=63868<878>244#	68#	?A78#	7B#	6856#	=	C("0#D/%&"#	98#

Fitting

2"/34.5#	T"\$"*.)
P@6#	@6A@6#J#?6A?#J#6
P@=#	@=A@=#J#?BA?B#J#6
P98#	98A98#J#?BA?B#J#6
P9?#	9?A9?#J#@8A@#J#6

W@=	=A@=
-----	------

R76#	=A76#C)'(#-/)U'.*#/)*)#
R7?#	77A??#C)'(#-/)U'.*#/)*)#

17?	7?A7?#10%,')U#..U&"#
	#



2"/34.5#	T"\$"*.)
L8=#	V=A76#\$"/)U#('"%T#
L78#	V78A76#\$"/)U#('"%T#
L@7#	6J7BA@J9#H4R#('"%T#
L@,#	@J=A@J9#H4R#('"%T#

!8;#	0)+('TX'Y##
!8E#	("ZY#TX'Y#

H7B#	98A@9#H[7#
H7E#	68A@E#H[7#

!79	7@A?B#)'*U#T)"3U%,')+#..U&"#
	#



RB Series

Housing:

made of pressed steel, double ball bearing swivel head, zinc plated, also available in other surface treatment.

Wheel:

solid rubber, black, also available in other colours.

2"/34.5#							
7@8?8P9?83898L898M244#	98#	7@#	6=#	3#	9?A9?J@8A@8J6#	@8#	
7@8?8P9?83868L868M244#	68#	7E	B=#	3#	9?A9?J@8A@8J6#	96#	

2"/34.5#							
7@8?8:7883898L898M244#	98#	7@#	6B56#	78#	#3	@8#	
7@8?8:7883868L868M244#	68#	7E	BB56#	78#	#3	96#	



ZB Series

zinc die cast, high polish chrome plated, with white transportation caps.



2"34.5				
8789?:8=63898L87?P\44#	98#	9?#	=#	?8#
8789?:8=63868L87BP\44#	68#	6?#	=#	@6#
8789?:8=638B8L87EP\44#	B8#	B?#	=#	68#

LU Series

Leg:

high quality polyamide, black.

Castor:

UH Series castors.



2"34.5					0"+	
67887Q?@63868<878>244#	68#	?A78#	7B#	##=8	φ 97A?@#	68#
67887Q9B63868<878>244#	68#	?A78#	7B#	78@	φ 97A9B#	68#
67887Q;863868<878> 244#	68#	?A78#	7B#	??;	φ 97A;8#	68#
67887QE763868<878>244#	68#	?A78#	7B#	79=	φ 97AE7#	68#

BX Series

Housing:

made of pressed steel, zinc plated.

Wheel:

high quality polyamide, black.



2"34.5							
788?@P@783876L87?244#	76#	7?#	7;#	@8A7B#	?7#	95?#	?8#
788?@P97838?6L879244#	?6#	79#	?E#	97A7=#	@8#	95?#	@8#
788?@P9@838@8L87?244#	@8#	76#	@@#	9BA?8#	@6#	65?#	@6#
788?@P6?83898L87B244#	98#	7B#	9@#	6=A?9#	9B#	65?#	98#
788?@PB?83896L87=244#	96#	7=#	9E#	B=A?9#	69#	B5?#	96#
788?@PB?83868L8?8244#	68#	?8#	67#	B=A?9#	69#	B5?#	68#

WB Series

Housing:

pressed steel, black coated, double ball bearing swivel head, with and without brake.

Wheel:

European beech wood, clear lacquered, with two black PU-rings.

Swivel Castor

2"/34.5#										
7@8B9:78@3868L87;H!44#	##68#	7#	?9#	##;?	78#	3	3#	3#	3	@8
7@8B6:78@3868L87;H!44#	##68#	7#	?9#	##;?	78#	3	3#	3#	3	@6
7@8B6:78@38;6L8?9H!44#	##;6#	?9#	?6#	787	78#	3	3#	3#	3	98
7@8B6:78@3788L8?BH!44#	788#	?B#	@?#	7?7	78#	3	3#	3#	3	68

Swivel Castor with Brake

2"34.5#									
7@@B9:78@3868L87;H!44#	##68#	7;#	?6#	##;?	78#	3	3#	3#	C("0#D/%&" @8#
7@9B6:78@3868L87;H!44#	##68#	7;#	?B#	##;?	78#	3	3#	3#	'!%0#D/%&" @6#
7@9B6:78@38;6L8?9H!44#	##;6#	?9#	@8#	787	78#	3	3#	3#	'!%0#D/%&" 98#
7@9B6:78@3788L8?BH!44#	788#	?B#	@8#	7?7	78#	3	3#	3#	'!%0#D/%&"# 68#

Swivel Castor

2"34.5#									
7@8B9P9?@3868L87;H!44#	##68#	7;#	?9#	##;?	3#	9?A9?#@8A@8#6#		3	@8#
7@8B6PB8@3868L87;H!44#	##68#	7;#	?9#	##;?	3#	B8AB8#BA9E# B#		3	@6#
7@8B6PB8@38;6L8?9H!44#	##;6#	?9#	?6#	787	3#	B8AB8#BA9E# B#		3	98#
7@8B6PB8@3788L8?BH!44#	788#	?B#	@?#	7?7	3#	B8AB8#BA9E# B#		3	68#

Swivel Castor with Brake

2"/34.5#											
7@@B9P9?@3868L87;H!44#	##68#	7;#	?6#	##;?	3#	9?A9?#@8A@8#6#		C("0#D/%&"			@8#
7@9B6PB8@3868L87;H!44#	##68#	7;#	?B#	##;?	3#	B8AB8#BA9E# B#		'!%0#D/%&"			@6#
7@9B6PB8@38;6L8?9H!44#	##;6#	?9#	@8#	787	3#	B8AB8#BA9E# B#		'!%0#D/%&"			98#
7@9B6PB8@3788L8?BH!44#	788#	?B#	@8#	7?7	3#	B8AB8#BA9E# B#		'!%0#D/%&"#			68#





Foroll
Chair Castor

CH Series

Housing:

high quality polyamide, black, with adapter.

Wheel:

high quality polyamide, black, for soft floors.

2"/34.5#								
6788BR7?63868<88=>244#	68#	?A=#	7E#	@=#	6;56#	77A??#	#####3#	68#
6788;R7?63868<88=> 244#	68#	?A=#	7E#	96#	6;56#	77A??#	#####3#	68#
6778BR7?63868<88=>244#	68#	?A=#	?@#	@=#	B856#	77A??#	)""\$)""*#D/%&"#	68#
6788BR7?63866<87?>244#	66#	?A7?#	?8#	@=#	B@#	77A??#	#####3#	66#
6788;R7?63866<87?> 244#	66#	?A7?#	?8#	96#	B@#	77A??#	#####3#	66#

CS Series

Housing:

high quality polyamide, black, with adapter.

Wheel:

high quality polypropylene copolymer wheel centre, TPE tread, for hard floors.

2"/34.5#								
6788BR7?63868<88=IP44#	68#	?A=#	7E#	@=#	6;56#	77A??#	3#	68#
6788;R7?63868<88=IP44#	68#	?A=#	7E#	96#	6;56#	77A??#	3#	68#
6788BR7?63866<87?IP44#	66#	?A7?#	?8#	@=#	B@#	77A??#	3#	66#
6788;R7?63866<87?IP44#	66#	?A7?#	?8#	96#	B@#	77A??#	3#	66#

CK Series

Housing:

high quality polyamide, black, with and without wheel brake

Wheel:


high quality polyamide,with precision ball bearing, unique design with low rolling resistance.

2"/34.5#							
51008C120-060D015YASN#	68#	?A15	26#	73#	77A??#	-	78#
51008C120-060D015YASN#	68#	?A75#	26#	73#	77A??#	C("0#D/%&"#	78#






Foroll Apparatus Castor

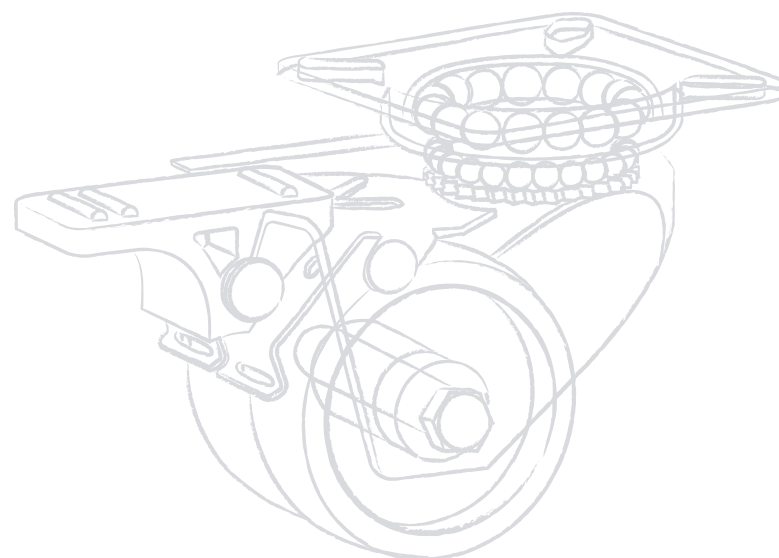

EAA Series



Housing:

pressed steel, zinc plated, double ball bearing swivel head, with and without wheel brake, light duty version.

Wheel:

nature polyamide, with plain bearing, high abrasion resistance, low rolling resistance, impact proof and corrosive resistant.

Art.-No.	Ø	18	21	8	KG	bearing type
030X018YANN	30	18	21	8	30	
040X018YANN	40	18	21	8	35	
050X018YANN	50	18	21	8	35	

Swivel Castor

Art.-No.	Ø	18	17	52	10	--	--	--	KG
13024H101--030S018 ANN	30	18	17	52	10	--	--	--	30
13024H101--040S018 ANN	40	18	17	57	10	--	--	--	35
13024H101--050S018 ANN	50	18	24	68	10	--	--	--	35

Swivel Castor with Wheel Brake

Art.-No.	Ø	18	25	57	10	--	--	-	KG
13324H101--040S018 ANN	40	18	25	57	10	--	--	-	35
13324H101--050S018 ANN	50	18	25	68	10	--	--	-	35

Swivel Castor

Art.-No.	Ø	18	17	52	-	42x42	30x30	5	KG
13024P421--030S018 ANN	30	18	17	52	-	42x42	30x30	5	30
13024P421--040S018 ANN	40	18	17	57	-	42x42	30x30	5	35
13024P421--050S018 ANN	50	18	24	68	--	42x42	30x30	5	35

Swivel Castor with Wheel Brake

Art.-No.	Ø	18	25	57	--	42x42	30x30	5	KG
13324P421--040S018 ANN	40	18	25	57	--	42x42	30x30	5	35
13324P421--050S018 ANN	50	18	25	68	--	42x42	30x30	5	35


Rigid Castor

Art.-No.	Ø	18	-	52	-	42x42	30x30	5	KG
10024P421--030S018 ANN	30	18	-	52	-	42x42	30x30	5	30
10024P421--040S018 ANN	40	18	-	57	-	42x42	30x30	5	35
10024P421--050S018 ANN	50	18	--	68	--	42x42	30x30	5	35



EAR Series

Housing:



pressed steel, zinc plated, double ball bearing swivel head, with and without wheel brake, light duty version.

Wheel:

high quality polyamide wheel centre, solid non-marking grey rubber tread, with plain bearing, impact proof, corrosive resistant.

Art--No.						bearing type
030X018RANN	30	18	21	8	30	
040X018RANN	40	18	21	8	35	
050X018RANN	50	18	21	8	35	

Swivel Castor

Art--No.									
13024H101--030S018RANN	30	18	17	52	10	--	--	--	30
13024H101--040S018RANN	40	18	17	57	10	--	--	--	35
13024H101--050S018RANN	50	18	24	68	10	--	--	--	35

Swivel Castor with Wheel Brake

Art--No.									
13324H101--040S018RANN	40	18	25	57	10	--	--	--	35
13324H101--050S018RANN	50	18	25	68	10	--	--	--	35

Swivel Castor

Art--No.									
13024P421--030S018RANN	30	18	17	52	-	42x42	30x30	5	30
13024P421--040S018RANN	40	18	17	57	-	42x42	30x30	5	35
13024P421--050S018RANN	50	18	24	68	--	42x42	30x30	5	35

Swivel Castor with Wheel Brake


Art--No.									
13324P421--040S018RANN	40	18	25	57	--	42x42	30x30	5	35
13324P421--050S018RANN	50	18	25	68	--	42x42	30x30	5	35

Rigid Castor

Art--No.									
10024P421--030S018RANN	30	18	-	52	-	42x42	30x30	5	30
10024P421--040S018RANN	40	18	-	57	-	42x42	30x30	5	35
10024P421--050S018RANN	50	18	--	68	--	42x42	30x30	5	35

EAT Series

Housing:



pressed steel, zinc plated, double ball bearing swivel head, with and without wheel brake, light duty version.

Wheel:

high quality polypropylene copolymer wheel centre, TPE tread, with plain bearing, impact proof, corrosive resistant.

Art--No.						bearing type
030X018TPNN	30	18	22	8	30	
040X018TPNN	40	18	21	8	35	
050X018TPNN	50	18	21	8	35	

Swivel Castor

Art--No.									
13024H101--030S018TPNN	30	18	17	52	10	--	--	--	30
13024H101--040S018TPNN	40	18	17	57	10	--	--	--	35
13024H101--050S018TPNN	50	18	24	68	10	--	--	--	35

Swivel Castor with Wheel Brake

Art--No.									
13324H101--040S018TPNN	40	18	25	57	10	--	--	--	35
13324H101--050S018TPNN	50	18	25	68	10	--	--	--	35

Swivel Castor

Art--No.									
13024P421--030S018TPNN	30	18	17	52	-	42x42	30x30	5	30
13024P421--040S018TPNN	40	18	17	57	-	42x42	30x30	5	35
13024P421--050S018TPNN	50	18	24	68	--	42x42	30x30	5	35

Swivel Castor with Wheel Brake

Art--No.									
13324P421--040S018TPNN	40	18	25	57	--	42x42	30x30	5	35
13324P421--050S018TPNN	50	18	25	68	--	42x42	30x30	5	35

Rigid Castor

Art--No.									
10024P421--030S018TPNN	30	18	-	52	-	42x42	30x30	5	30
10024P421--040S018TPNN	40	18	-	57	-	42x42	30x30	5	35
10024P421--050S018TPNN	50	18	--	68	--	42x42	30x30	5	35


LAA Series

Housing:

pressed steel, zinc plated, double ball bearing swivel head, with and without total brake, medium duty version.

Wheel:

high quality polyamide, with plain bearing, high abrasion resistance, low rolling resistance, impact proof and corrosive resistant.



Art--No.						bearing type
050X020YANN	50	20	22	8	40	
075X022YANN	75	22	29	8	50	
100X024YANN	100	24	29	8	60	

Swivel Castor

Art--No.									
13028H101-050S020YANN	50	20	25.5	70	11	--	--	--	40
13028H101-075S022YANN	75	22	28.5	100	11	--	--	--	50
13028H101-100S024YANN	100	24	33	122	11	--	--	--	60

Swivel Castor with Total Brake

Art--No.									
13428H101-050S020YANN	50	20	27.5	70	11	--	--	--	40
13428H101-075S022YANN	75	22	28.5	100	11	--	--	--	50
13428H101-100S024YANN	100	24	33	122	11	--	--	--	60

Swivel Castor

Art--No.									
13028P601-050S020YANN	50	20	25.5	70	--	60x60	46x46	6	40
13028P601-075S022YANN	75	22	28.5	100	--	60x60	46x46	6	50
13028P601-100S024YANN	100	24	33	122	--	60x60	46x46	6	60

Swivel Castor with Total Brake

Art--No.									
13428P601-050S020YANN	50	20	27.5	70	--	60x60	46x46	6	40
13428P601-075S022YANN	75	22	28.5	100	--	60x60	46x46	6	50
13428P601-100S024YANN	100	24	33	122	--	60x60	46x46	6	60

Alternative Fittings:




LAA Series

Housing:

pressed steel, zinc plated, double ball bearing swivel head, with and without total brake, medium duty version.

Wheel:

high quality polyamide, with plain bearing, high abrasion resistance, low rolling resistance, impact proof and corrosive resistant.



Swivel Castor

Art--No.									
13025H101--050S020 ANN	50	20	24	72	10	--	--	--	40
13027H101--050S022 ANN	50	22	25	72	10	--	--	--	50
13025H101--060S022 ANN	60	22	22	82	10	--	--	--	50
13025H101--075S022 ANN	75	22	25	101	10	--	--	--	50
13025H101--100S024 ANN	100	24	32	121	10	--	--	--	60

Swivel Castor with Total Brake

Art--No.									
13425H101-050S020YANN	50	20	26	72	10	--	--	--	40
13427H101-050S022YANN	50	22	22.5	72	10	--	--	--	50
13425H101-060S022YANN	60	22	19	82	10	--	--	--	50
13425H101-075S022YANN	75	22	30	101	10	-	-	-	50
13425H101-100S024YANN	100	24	30	121	10	--	--	--	60

Swivel Castor

Art--No.									
13025P601-050S020YANN	50	20	24	72	--	60x60	46x46	6	40
13027P601-050S022YANN	50	22	25	72	--	60x60	46x46	6	50
13025P601-060S022YANN	60	22	22	82	--	60x60	46x46	6	50
13025P601-075S022YANN	75	22	25	101	--	60x60	46x46	6	50
13025P601-100S024YANN	100	24	32	121	--	60x60	46x46	6	60

Swivel Castor with Total Brake

Art--No.									
13425P601--050S020 ANN	50	20	26	72	--	60x60	46x46	6	40
13427P601--050S022 ANN	50	22	22.5	72	--	60x60	46x46	6	50
13425P601--060S022 ANN	60	22	19	82	--	60x60	46x46	6	50
13425P601--075S022 ANN	75	22	30	101	--	60x60	46x46	6	50
13425P601--100S024 ANN	100	24	30	121	--	60x60	46x46	6	60

Rigid Castor

Art--No.									
10025P601--050S020 ANN	50	20	--	72	--	60x60	46x46	6	40
10027P601--050S022 ANN	50	22	--	72	--	60x60	46x46	6	50
10025P601--060S022 ANN	60	22	--	82	--	60x60	46x46	6	50
10025P601--075S022 ANN	75	22	--	101	--	60x60	46x46	6	50
10025P601--100S024 ANN	100	24	--	121	--	60x60	46x46	6	60


LAA Series

Housing:

pressed steel, zinc plated, double ball bearing swivel head, with and without total brake, medium duty version.

Wheel:

high quality polyamide, with plain bearing, high abrasion resistance, low rolling resistance, impact proof and corrosive resistant.



Swivel Castor

Art--No.									KG
14025H101--075S022 ANN	75	22	28	102.5	10	--	--	--	50
14025H101--100S024 ANN	100	24	31	125	10	--	--	--	60
14025H101--125S028 ANN	125	28	29	156	10	--	--	--	65

Swivel Castor with Total Brake

Art--No.									KG
14425H101--075S022 ANN	75	22	32	102.5	10	--	--	--	50
14425H101--100S024 ANN	100	24	35	125	10	--	--	--	60
14425H101--125S028 ANN	125	28	34	156	10	--	--	--	65

Swivel Castor

Art--No.									KG
14025P601--075S022 ANN	75	22	28	104.5	--	60x60	46x46	6	50
14025P601--100S024 ANN	100	24	31	127	--	60x60	46x46	6	60
14025P601--125S028 ANN	125	28	29	158	--	60x60	46x46	6	65

Swivel Castor with Total Brake

Art--No.									KG
14425P601--075S022 ANN	75	22	32	104.5	--	60x60	46x46	6	50
14425P601--100S024 ANN	100	24	35	127	--	60x60	46x46	6	60
14425P601--125S028 ANN	125	28	34	158	--	60x60	46x46	6	65

Alternative Fittings:




LAR Series

Housing:

pressed steel, zinc plated, double ball bearing swivel head, with and without total brake, medium duty version.

Wheel:

high quality polyamide wheel centre, solid non-marking rubber tread, with plain bearing, impact proof, corrosive resistant.



Art--No.									bearing type
050X018RANN	50	18	21	8	40				
050X024RANN	50	24	28	8	50				
060X024RANN	60	24	28	8	50				
075X024RANN	75	24	28	8	50				
080X024RANN	80	24	28	8	50				
100X024RANN	100	24	28	8	60				
125X026RANN	125	26	28	8	65				

Swivel Castor

Art--No.									KG
13028H101-050S018RANN	50	18	25.5	70	11	--	--	--	40
13028H101-075S024RANN	75	24	28.5	100	11	--	--	--	50
13028H101-100S024RANN	100	24	33	122	11	--	--	--	60

Swivel Castor with Total Brake

Art--No.									KG
13428H101-050S018RANN	50	18	27.5	70	11	--	--	--	40
13428H101-075S024RANN	75	24	28.5	100	11	--	--	--	50
13428H101-100S024RANN	100	24	33	122	11	--	--	--	60

Swivel castor

Art--No.									KG
13028P601-050S018RANN	50	18	25.5	70	--	60x60	46x46	6	40
13028P601-075S024RANN	75	24	28.5	100	--	60x60	46x46	6	50
13028P601-100S024RANN	100	24	33	122	--	60x60	46x46	6	60

Swivel Castor with Total Brake

Art--No.									KG
13428P601-050S018RANN	50	18	27.5	70	--	60x60	46x46	6	40
13428P601-075S024RANN	75	24	28.5	100	--	60x60	46x46	6	50
13428P601-100S024RANN	100	24	33	122	--	60x60	46x46	6	60

Alternative Fittings:



LAR Series

Housing:

pressed steel, zinc plated, double ball bearing swivel head, with and without total brake, medium duty version.

Wheel:

high quality polyamide wheel centre, solid non-marking rubber tread, with plain bearing, impact proof, corrosive resistant.

Swivel Castor

Art--No.										KG
13025H101--050S018RAN	50	18	24	72	10	-	-	-	-	40
13027H101--050S024RANN	50	24	25	72	10	--	--	--	--	50
13025H101--060S024RANN	60	24	22	82	10	--	--	--	--	50
13025H101--075S024RANN	75	24	25	101	10	--	--	--	--	50
13025H101--080S024RANN	80	24	25	103.5	10	--	--	--	--	50
13025H101--100S024RANN	100	24	32	121	10	--	--	--	--	60

Swivel Castor with Total Brake

Art--No.										KG
13425H101--050S018RAN	50	18	26	72	10	-	-	-	-	40
13427H101--050S024RANN	50	24	22.5	72	10	--	--	--	--	50
13425H101--060S024RANN	60	24	19	82	10	--	--	--	--	50
13425H101--075S024RANN	75	24	30	101	10	--	--	--	--	50
13425H101--080S024RANN	80	24	30	103.5	10	--	--	--	--	50
13425H101--100S024RANN	100	24	30	121	10	--	--	--	--	60

Swivel Castor

Art--No.										KG
13025P601--050S018RAN	50	18	24	72	-	60x60	46x46	6	-	40
13027P601--050S024RANN	50	24	25	72	--	60x60	46x46	6	-	50
13025P601--060S024RANN	60	24	22	82	--	60x60	46x46	6	-	50
13025P601--075S024RANN	75	24	25	101	--	60x60	46x46	6	-	50
13025P601--080S024RANN	80	24	25	103.5	--	60x60	46x46	6	-	50
13025P601--100S024RANN	100	24	32	121	--	60x60	46x46	6	-	60

Swivel Castor with Total Brake

Art--No.										KG
13425P601--050S018RAN	50	18	26	72	-	60x60	46x46	6	-	40
13427P601--050S024RANN	50	24	22.5	72	--	60x60	46x46	6	-	50
13425P601--060S024RANN	60	24	19	82	--	60x60	46x46	6	-	50
13425P601--075S024RANN	75	24	30	101	--	60x60	46x46	6	-	50
13425P601--080S024RANN	80	24	30	103.5	--	60x60	46x46	6	-	50
13425P601--100S024RANN	100	24	30	121	--	60x60	46x46	6	-	60

Rigid Castor

Art--No.										KG
10025P601--050S018RAN	50	18	-	72	-	60x60	46x46	6	-	40
10027P601--050S024RANN	50	24	-	72	-	60x60	46x46	6	-	50
10025P601--060S024RANN	60	24	-	82	-	60x60	46x46	6	-	50
10025P601--075S024RANN	75	24	-	101	-	60x60	46x46	6	-	50
10025P601--080S024RANN	80	24	-	103.5	-	60x60	46x46	6	-	50
10025P601--100S024RANN	100	24	-	121	-	60x60	46x46	6	-	60

LAR Series

Housing:

pressed steel, zinc plated, double ball bearing swivel head, with and without total brake, medium duty version.

Wheel:

high quality polyamide wheel centre, solid non-marking rubber tread, with plain bearing, impact proof, corrosive resistant.

Swivel Castor

Art--No.										KG
14025H101--075S024RANN	75	24	28	102.5	10	--	--	--	--	50
14025H101--100S024RANN	100	24	31	125	10	--	--	--	--	60
14025H101--125S026RANN	125	26	29	156	10	--	--	--	--	65

Swivel Castor with Total Brake

Art--No.										KG
14425H101--075S024RANN	75	24	32	102.5	10	--	--	--	--	50
14425H101--100S024RANN	100	24	35	125	10	--	--	--	--	60
14425H101--125S026RANN	125	26	34	156	10	--	--	--	--	65

Swivel Castor

Art--No.										KG
14025P601--075S024RANN	75	24	28	104.5	--	60x60	46x46	6	-	50
14025P601--100S024RANN	100	24	31	127	--	60x60	46x46	6	-	60
14025P601--125S026RANN	125	26	29	158	--	60x60	46x46	6	-	65

Swivel Castor with Total Brake

Art--No.										KG
14425P601--075S024RANN	75	24	32	104.5	-	60x60	46x46	6	-	50
14425P601--100S024RANN	100	24	35	127	-	60x60	46x46	6	-	60
14425P601--125S026RANN	125	26	34	158	-	60x60	46x46	6	-	65

Alternative Fittings:



LAR Series

Housing:

pressed steel, zinc plated, double ball bearing swivel head, with and without total brake, medium duty version.

Wheel:

high quality polyamide wheel centre, solid non-marking rubber tread, with plain bearing, impact proof, corrosive resistant.

Swivel Castor

Art--No.										KG
14025H101--075S024RANN	75	24	28	102.5	10	--	--	--	--	50
14025H101--100S024RANN	100	24	31	125	10	--	--	--	--	60
14025H101--125S026RANN	125	26	29	156	10	--	--	--	--	65

Swivel Castor with Total Brake

Art--No.										KG
14425H101--075S024RANN	75	24	32	102.5	10	--	--	--	--	50
14425H101--100S024RANN	100	24	35	125	10	--	--	--	--	60
14425H101--125S026RANN	125	26	34	156	10	--	--	--	--	65

Swivel Castor

Art--No.										KG
14025P601--075S024RANN	75	24	28	104.5	--	60x60	46x46	6	-	50
14025P601--100S024RANN	100	24	31	127	--	60x60	46x46	6	-	60
14025P601--125S026RANN	125	26	29	158	--	60x60	46x46	6	-	65

Swivel Castor with Total Brake

Art--No.										KG
14425P601--075S024RANN	75	24	32	104.5	-	60x60	46x46	6	-	50
14425P601--100S024RANN	100	24	35	127	-	60x60	46x46	6	-	60
14425P601--125S026RANN	125	26	34	158	-	60x60	46x46	6	-	65

Alternative Fittings:




LARB Series

Housing:

pressed steel, zinc plated, double ball bearing swivel head, with and without total brake, medium duty version.

Wheel:

high quality polypropylene copolymer wheel centre, solid non-marking grey rubber tread, with flange bearing, low rolling resistance, impact proof and corrosive resistant.



Art--No.						bearing type
050X018RPCN	50	20	23	6	40	
075X022RPCN	75	22	30	6	50	
100X025RPCN	100	25	30	6	60	

Swivel Castor

Art--No.										
13028H101-050S018RPCN	50	20	25.5	70	11	--	--	--	--	40
13028H101-075S022RPCN	75	22	28.5	100	11	--	--	--	--	50
13028H101-100S025RPCN	100	24	33	122	11	--	--	--	--	60

Swivel Castor with Total Brake

Art--No.										
13428H101-050S018RPCN	50	20	27.5	70	11	--	--	--	--	40
13428H101-075S022RPCN	75	22	28.5	100	11	--	--	--	--	50
13428H101-100S025RPCN	100	24	33	122	11	--	--	--	--	60

Swivel Castor

Art--No.									
13028P601-050S018RPCN	50	20	25.5	70	--	60x60	46x46	6	40
13028P601-075S022RPCN	75	22	28.5	100	--	60x60	46x46	6	50
13028P601-100S025RPCN	100	24	33	122	--	60x60	46x46	6	60

Swivel Castor with Total Brake

Art--No.									
13428P601-050S018RPCN	50	20	27.5	70	--	60x60	46x46	6	40
13428P601-075S022RPCN	75	22	28.5	100	--	60x60	46x46	6	50
13428P601-100S025RPCN	100	24	33	122	--	60x60	46x46	6	60

Alternative Fittings:




LARB Series

Housing:

pressed steel, zinc plated, double ball bearing swivel head, with and without total brake, medium duty version.

Wheel:

high quality polypropylene copolymer wheel centre, solid non-marking grey rubber tread, with flange bearing, low rolling resistance, impact proof and corrosive resistant.



Swivel Castor

Art--No.										
13025H101--050S018RPCN	50	18	24	72	10	--	--	--	--	40
13025H101--075S022RPCN	75	22	25	101	10	--	--	--	--	50
13025H101--100S025RPCN	100	25	32	121	10	--	--	--	--	60

Swivel Castor with Total Brake

Art--No.										
13425H101--050S018RPCN	50	18	26	72	10	--	--	--	--	40
13425H101--075S022RPCN	75	22	30	101	10	--	--	--	--	50
13425H101--100S025RPCN	100	25	30	121	10	--	--	--	--	60

Swivel Castor

Art--No.									
13025P601--050S018RPCN	50	18	24	72	--	60x60	46x46	6	40
13025P601--075S022RPCN	75	22	25	101	--	60x60	46x46	6	50
13025P601--100S025RPCN	100	25	32	121	--	60x60	46x46	6	60

Swivel Castor with Total Brake

Art--No.									
13425P601--050S018RPCN	50	18	26	72	--	60x60	46x46	6	40
13425P601--075S022RPCN	75	22	30	101	--	60x60	46x46	6	50
13425P601--100S025RPCN	100	25	30	121	--	60x60	46x46	6	60

Rigid Castor

Art--No.									
10025P601--050S018RPCN	50	18	--	72	--	60x60	46x46	6	40
10025P601--075S022RPCN	75	22	--	101	--	60x60	46x46	6	50
10025P601--100S025RPCN	100	25	--	121	--	60x60	46x46	6	60


LARB Series

Housing:

pressed steel, zinc plated, double ball bearing swivel head, with and without total brake, medium duty version.

Wheel:

high quality polypropylene copolymer wheel centre, solid non-marking grey rubber tread, with flange bearing, low rolling resistance, impact proof and corrosive resistant.



Swivel Castor

Art--No.											KG
14025H101-075S024RPCN	75	24	28	102.5	10	--	--	--	--	--	50
14025H101-100S024RPCN	100	24	31	125	10	--	--	--	--	--	60
14025H101-125S026RPCN	125	26	29	156	10	--	--	--	--	--	65

Swivel Castor with Total Brake

Art--No.											KG
14425H101-075S024RPCN	75	24	32	102.5	10	--	--	--	--	--	50
14425H101-100S024RPCN	100	24	35	125	10	--	--	--	--	--	60
14425H101-125S026RPCN	125	26	34	156	10	--	--	--	--	--	65

Swivel Castor

Art--No.											KG
14025P601-075S024RPCN	75	24	28	104.5	--	60x60	46x46	6	50		
14025P601-100S024RPCN	100	24	31	127	--	60x60	46x46	6	60		
14025P601-125S026RPCN	125	26	29	158	--	60x60	46x46	6	65		

Swivel Castor with Total Brake

Art--No.											KG
14425P601-075S024RPCN	75	24	32	104.5	-	60x60	46x46	6	50		
14425P601-100S024RPCN	100	24	35	127	-	60x60	46x46	6	60		
14425P601-125S026RPCN	125	26	34	158	-	60x60	46x46	6	65		

Alternative Fittings:




LAT Series

Housing:

pressed steel, zinc plated, double ball bearing swivel head, with and without total brake, medium duty version.

Wheel:

high quality polypropylene copolymer wheel centre, TPE tread, with plain bearing, impact proof, corrosive resistant.



Art--No.											KG	bearing type
050X018TPNN	50	18	21	8	40							
060X022TPNN	60	22	28	8	50							
075X022TPNN	75	22	28	8	50							
100X022TPNN	100	22	28	8	60							
125X028TPNN	125	28	28	8	65							

Swivel Castor

Art--No.											KG
13028H101-050S018TPNN	50	20	25.5	70	11	--	--	--	--	--	40
13028H101-075S022TPNN	75	22	28.5	100	11	--	--	--	--	--	50
13028H101-100S022TPNN	100	22	33	122	11	--	--	--	--	--	60

Swivel Castor with Total Brake

Art--No.											KG
13428H101-050S018TPNN	50	20	27.5	70	11	--	--	--	--	--	40
13428H101-075S022TPNN	75	22	28.5	100	11	--	--	--	--	--	50
13428H101-100S022TPNN	100	22	33	122	11	--	--	--	--	--	60

Swivel Castor

Art--No.											KG
13028P601-050S018TPNN	50	20	25.5	70	--	60x60	46x46	6	40		
13028P601-075S022TPNN	75	22	28.5	100	--	60x60	46x46	6	50		
13028P601-100S022TPNN	100	22	33	122	--	60x60	46x46	6	60		

Swivel Castor with Total Brake

Art--No.											KG
13428P601-050S018TPNN	50	20	27.5	70	--	60x60	46x46	6	40		
13428P601-075S022TPNN	75	22	28.5	100	--	60x60	46x46	6	50		
13428P601-100S022TPNN	100	22	33	122	--	60x60	46x46	6	60		

Alternative Fittings:




LAT Series

Housing:

pressed steel, zinc plated, double ball bearing swivel head, with and without total brake, medium duty version.

Wheel:

high quality polypropylene copolymer wheel centre, TPE tread, with plain bearing, impact proof, corrosive resistant.



Swivel Castor

Art--No.									
13025H101--050S018TPNN	50	18	24	72	10	--	--	--	40
13025H101--060S022TPNN	60	22	22	82	10	--	--	--	50
13025H101--075S022TPNN	75	22	25	101	10	--	--	--	50
13025H101--100S022TPNN	100	22	32	121	10	--	--	--	60

Swivel Castor with Total Brake

Art--No.									
13425H101--050S018TPNN	50	18	26	72	10	--	--	--	40
13425H101--060S022TPNN	60	22	19	82	10	--	--	--	50
13425H101--075S022TPNN	75	22	30	101	10	--	--	--	50
13425H101--100S022TPNN	100	22	30	121	10	--	--	--	60

Swivel Castor

Art--No.									
13025P601--050S018TPNN	50	18	24	72	--	60x60	46x46	6	40
13025P601--060S022TPNN	60	22	22	82	--	60x60	46x46	6	50
13025P601--075S022TPNN	75	22	25	101	--	60x60	46x46	6	50
13025P601--100S022TPNN	100	22	32	121	--	60x60	46x46	6	60

Swivel Castor with Total Brake

Art--No.									
13425P601--050S018TPNN	50	18	26	72	--	60x60	46x46	6	40
13425P601--060S022TPNN	60	22	19	82	--	60x60	46x46	6	50
13425P601--075S022TPNN	75	22	30	101	--	60x60	46x46	6	50
13425P601--100S022TPNN	100	22	30	121	--	60x60	46x46	6	60

Rigid Castor

Art--No.									
10025P601--050S018TPNN	50	18	--	72	--	60x60	46x46	6	40
10025P601--060S022TPNN	60	22	--	82	--	60x60	46x46	6	50
10025P601--075S022TPNN	75	22	--	101	--	60x60	46x46	6	50
10025P601--100S022TPNN	100	22	--	121	--	60x60	46x46	6	60


LAT Series

Housing:

pressed steel, zinc plated, double ball bearing swivel head, with and without total brake, medium duty version.

Wheel:

high quality polypropylene copolymer wheel centre, TPE tread, with plain bearing, impact proof, corrosive resistant.



Swivel Castor

Art--No.									
14025H101--075S022TPNN	75	22	28	102.5	10	--	--	--	50
14025H101--100S022TPNN	100	22	31	125	10	--	--	--	60
14025H101--125S028TPNN	125	28	29	156	10	--	--	--	65

Swivel Castor with Total Brake

Art--No.									
14425H101--075S022TPNN	75	22	32	102.5	10	--	--	--	50
14425H101--100S022TPNN	100	22	35	125	10	--	--	--	60
14425H101--125S028TPNN	125	28	34	156	10	--	--	--	65

Swivel Castor

Art--No.									
14025P601--075S022TPNN	75	22	28	104.5	--	60x60	46x46	6	50
14025P601--100S022TPNN	100	22	31	127	--	60x60	46x46	6	60
14025P601--125S028TPNN	125	28	29	158	--	60x60	46x46	6	65

Swivel Castor with Total Brake

Art--No.									
14425P601--075S022TPNN	75	22	32	104.5	--	60x60	46x46	6	50
14425P601--100S022TPNN	100	22	35	127	--	60x60	46x46	6	60
14425P601--125S028TPNN	125	28	34	158	--	60x60	46x46	6	65

Alternative Fittings:




LATB Series

Housing:

pressed steel, zinc plated, double ball bearing swivel head, with and without total brake, medium duty version.

Wheel:

high quality polypropylene copolymer wheel centre, TPE tread, with precision ball bearing, plastic threadguards, low rolling resistance, impact proof and corrosive resistant.



Art--No.						bearing type
050X018TPBP	50	18	23	6	40	
060X024TPBP	60	24	30	6	50	
075X024TPBP	75	24	30	6	50	
100X024TPBP	100	24	30	6	60	

Swivel Castor

Art--No.									
13028H101-050S018TPBP	50	18	25.5	70	11	--	--	--	40
13028H101-075S024TPBP	75	24	28.5	100	11	--	--	--	50
13028H101-100S024TPBP	100	24	33	122	11	--	--	--	60

Swivel Castor with Total Brake

Art--No.									
13428H101-050S018TPBP	50	18	27.5	70	11	--	--	--	40
13428H101-075S024TPBP	75	24	28.5	100	11	--	--	--	50
13428H101-100S024TPBP	100	24	33	122	11	--	--	--	60

Swivel Castor

Art--No.									
13028P601-050S018TPBP	50	18	25.5	70	--	60x60	46x46	6	40
13028P601-075S024TPBP	75	24	28.5	100	--	60x60	46x46	6	50
13028P601-100S024TPBP	100	24	33	122	--	60x60	46x46	6	60

Swivel Castor with Total Brake

Art--No.									
13428P601-050S018TPBP	50	18	27.5	70	--	60x60	46x46	6	40
13428P601-075S024TPBP	75	24	28.5	100	--	60x60	46x46	6	50
13428P601-100S024TPBP	100	24	33	122	--	60x60	46x46	6	60

Alternative Fittings:




LATB Series

Housing:

pressed steel, zinc plated, double ball bearing swivel head, with and without total brake, medium duty version.

Wheel:

high quality polypropylene copolymer wheel centre, TPE tread, with precision ball bearing, plastic threadguards, low rolling resistance, impact proof and corrosive resistant.



Swivel Castor

Art--No.									
13025H101--050S018TPB	50	18	24	72	10	--	--	--	40
13025H101--060S024TPB	60	24	22	82	10	--	--	--	50
13025H101--075S024TPB	75	24	25	101	10	--	--	--	50
13025H101--100S024TPB	100	24	32	121	10	--	--	--	60

Swivel Castor with Total Brake

Art--No.									
13425H101--050S018TPB	50	18	26	72	10	--	--	--	40
13425H101--060S024TPB	60	24	19	82	10	--	--	--	50
13425H101--075S024TPB	75	24	30	101	10	--	--	--	50
13425H101--100S024TPB	100	24	30	121	10	--	--	--	60

Swivel Castor

Art--No.									
13025P601--050S018TPB	50	18	24	72	--	60x60	46x46	6	40
13025P601--060S024TPB	60	24	22	82	--	60x60	46x46	6	50
13025P601--075S024TPB	75	24	25	101	--	60x60	46x46	6	50
13025P601--100S024TPB	100	24	32	121	--	60x60	46x46	6	60

Swivel Castor with Total Brake

Art--No.									
13425P601--050S018TPB	50	18	26	72	--	60x60	46x46	6	40
13425P601--060S024TPB	60	24	19	82	--	60x60	46x46	6	50
13425P601--075S024TPB	75	24	30	101	--	60x60	46x46	6	50
13425P601--100S024TPB	100	24	30	121	--	60x60	46x46	6	60

Rigid Castor

Art--No.									
10025P601--050S018TPB	50	18	--	72	--	60x60	46x46	6	40
10025P601--060S024TPB	60	24	--	82	--	60x60	46x46	6	50
10025P601--075S024TPB	75	24	--	101	--	60x60	46x46	6	50
10025P601--100S024TPB	100	24	--	121	--	60x60	46x46	6	60


LATB Series

Housing:

pressed steel, zinc plated, double ball bearing swivel head, with and without total brake, medium duty version.

Wheel:

high quality polypropylene copolymer wheel centre, TPE tread, with precision ball bearing, plastic threadguards, low rolling resistance, impact proof and corrosive resistant.



Swivel Castor

Art--No.										KG
14025H101--075S024TPB	75	24	28	102.5	10	--	--	--	--	50
14025H101--100S024TPB	100	24	31	125	10	--	--	--	--	60

Swivel Castor with Total Brake

Art--No.										KG
14425H101--075S024TPB	75	24	32	102.5	10	--	--	--	--	50
14425H101--100S024TPB	100	24	35	125	10	--	--	--	--	60

Swivel Castor

Art--No.										KG
14025P601--075S024TPB	75	24	28	104.5	-	60x60	46x46	6	50	50
14025P601--100S024TPB	100	24	31	127	-	60x60	46x46	6	60	60

Swivel Castor with Total Brake

Art--No.										KG
14425P601--075S024TPB	75	24	32	104.5	-	60x60	46x46	6	50	50
14425P601--100S024TPB	100	24	35	127	-	60x60	46x46	6	60	60

Alternative Fittings:




LAU Series

Housing:

pressed steel, zinc plated, double ball bearing swivel head, with and without total brake, medium duty version.

Wheel:

high quality polyamide wheel centre, non-marking polyurethane tread, with plain bearing, high abrasion resistance, impact proof and corrosive resistant.



Art--No.										KG	bearing type
050X018UANN	50	18	21	8	40						
075X025UANN	75	25	28	8	50						
100X025UANN	100	25	28	8	60						

Swivel Castor

Art--No.										KG
13028H101-050S018UANN	50	18	25.5	70	11	--	--	--	--	40
13028H101-075S025UANN	75	25	28.5	100	11	--	--	--	--	50
13028H101-100S025UANN	100	25	33	122	11	--	--	--	--	60

Swivel Castor with Total Brake

Art--No.										KG
13428H101-050S018UANN	50	18	27.5	70	11	--	--	--	--	40
13428H101-075S025UANN	75	25	28.5	100	11	--	--	--	--	50
13428H101-100S025UANN	100	25	33	122	11	--	--	--	--	60

Swivel Castor

Art--No.										KG
13028P601-050S018UANN	50	18	25.5	70	--	60x60	46x46	6	40	40
13028P601-075S025UANN	75	25	28.5	100	--	60x60	46x46	6	50	50
13028P601-100S025UANN	100	25	33	122	--	60x60	46x46	6	60	60

Swivel Castor with Total Brake

Art--No.										KG
13428P601-050S018UANN	50	18	27.5	70	--	60x60	46x46	6	40	40
13428P601-075S025UANN	75	25	28.5	100	--	60x60	46x46	6	50	50
13428P601-100S025UANN	100	25	33	122	--	60x60	46x46	6	60	60

Alternative Fittings:




LAU Series

Housing:

pressed steel, zinc plated, double ball bearing swivel head, with and without total brake, medium duty version.

Wheel:

high quality polyamide wheel centre, non-marking polyurethane tread, with plain bearing, high abrasion resistance, impact proof and corrosive resistant.



Swivel Castor

Art--No.	Ø	1	2	3	4	5	6	7	KG
13025H101--050S018UANN	50	18	24	72	10	--	--	--	40
13025H101--075S025UANN	75	25	25	101	10	--	--	--	50
13025H101--100S025UANN	100	25	32	121	10	--	--	--	60

Swivel Castor with Total Brake

Art--No.	Ø	1	2	3	4	5	6	7	KG
13425H101--050S018UANN	50	18	26	72	10	--	--	--	40
13425H101--075S025UANN	75	25	30	101	10	--	--	--	50
13425H101--100S025UANN	100	25	30	121	10	--	--	--	60

Swivel Castor

Art--No.	Ø	1	2	3	4	5	6	7	KG
13025P601--050S018UANN	50	18	24	72	--	60x60	46x46	6	40
13025P601--075S025UANN	75	25	25	101	--	60x60	46x46	6	50
13025P601--100S025UANN	100	25	32	121	--	60x60	46x46	6	60

Swivel Castor with Total Brake

Art--No.	Ø	1	2	3	4	5	6	7	KG
13425P601--050S018UANN	50	18	26	72	--	60x60	46x46	6	40
13425P601--075S025UANN	75	25	30	101	--	60x60	46x46	6	50
13425P601--100S025UANN	100	25	30	121	--	60x60	46x46	6	60

Rigid Castor

Art--No.	Ø	1	2	3	4	5	6	7	KG
10025P601--050S018UANN	50	18	--	72	--	60x60	46x46	6	40
10025P601--075S025UANN	75	25	--	101	--	60x60	46x46	6	50
10025P601--100S025UANN	100	25	--	121	--	60x60	46x46	6	60


LAU Series

Housing:

pressed steel, zinc plated, double ball bearing swivel head, with and without total brake, medium duty version.

Wheel:

high quality polyamide wheel centre, non-marking polyurethane tread, with plain bearing, high abrasion resistance, impact proof and corrosive resistant.



Swivel Castor

Art--No.	Ø	1	2	3	4	5	6	7	KG
14025H101--075S025UANN	75	25	28	102.5	10	--	--	--	50
14025H101--100S025UANN	100	25	31	125	10	--	--	--	60

Swivel Castor with Total Brake

Art--No.	Ø	1	2	3	4	5	6	7	KG
14425H101--075S025UANN	75	25	32	102.5	10	--	--	--	50
14425H101--100S025UANN	100	25	35	125	10	--	--	--	60

Swivel Castor

Art--No.	Ø	1	2	3	4	5	6	7	KG
14025P601--075S025UANN	75	25	28	104.5	-	60x60	46x46	6	50
14025P601--100S025UANN	100	25	31	127	-	60x60	46x46	6	60

Swivel Castor with Total Brake

Art--No.	Ø	1	2	3	4	5	6	7	KG
14425P601--075S025UANN	75	25	32	104.5	-	60x60	46x46	6	50
14425P601--100S025UANN	100	25	35	127	-	60x60	46x46	6	60

Alternative Fittings:




LAK Series

Housing:

pressed steel, zinc plated, double ball bearing swivel head, with and without total brake, medium duty version.

Wheel:

high transparent polyurethane, UV resistant, with precision ball bearing, high abrasion resistance, low rolling resistance, impact proof and corrosive resistant.



Art--No.						KG	bearing type
050X018YKCN	50	18	23	8	40		
075X024YKCN	75	24	29	8	50		
100X024YKCN	100	24	29	8	60		

Swivel Castor

Art--No.									KG
13028H101-050S018YKCN	50	18	25.5	70	11	--	--	--	40
13028H101-075S024YKCN	75	24	28.5	100	11	--	--	--	50
13028H101-100S024YKCN	100	24	33	122	11	--	--	--	60

Swivel Castor with Total Brake

Art--No.									KG
13428H101-050S018YKCN	50	18	27.5	70	11	--	--	--	40
13428H101-075S024YKCN	75	24	28.5	100	11	--	--	--	50
13428H101-100S024YKCN	100	24	33	122	11	--	--	--	60

Swivel Castor

Art--No.									KG
13028P601-050S018YKCN	50	18	25.5	70	--	60x60	46x46	6	40
13028P601-075S024YKCN	75	24	28.5	100	--	60x60	46x46	6	50
13028P601-100S024YKCN	100	24	33	122	--	60x60	46x46	6	60

Swivel Castor with Total Brake

Art--No.									KG
13428P601-050S018YKCN	50	18	27.5	70	--	60x60	46x46	6	40
13428P601-075S024YKCN	75	24	28.5	100	--	60x60	46x46	6	50
13428P601-100S024YKCN	100	24	33	122	--	60x60	46x46	6	60

Alternative Fittings:




BLAA Series

Housing:

pressed steel, non-reflection black coated, double ball bearing swivel head, with and without total brake, medium duty version.

Wheel:

high quality polyamide, with plain bearing, high abrasion resistance, low rolling resistance, impact proof and corrosive resistant.



Swivel Castor

Art--No.									KG
13068H101-050S020YANN	50	20	25.5	70	11	--	--	--	40
13068H101-075S022YANN	75	22	28.5	100	11	--	--	--	50
13068H101-100S024YANN	100	24	33	122	11	--	--	--	60

Swivel Castor with Total Brake

Art--No.									KG
13468H101-050S020YANN	50	20	27.5	70	11	--	--	--	40
13468H101-075S022YANN	75	22	28.5	100	11	--	--	--	50
13468H101-100S024YANN	100	24	33	122	11	--	--	--	60

Swivel Castor

Art--No.									KG
13068P601-050S020YANN	50	20	25.5	70	--	60x60	46x46	6	40
13068P601-075S022YANN	75	22	28.5	100	--	60x60	46x46	6	50
13068P601-100S024YANN	100	24	33	122	--	60x60	46x46	6	60

Swivel Castor with Total Brake

Art--No.									KG
13468P601-050S020YANN	50	20	27.5	70	--	60x60	46x46	6	40
13468P601-075S022YANN	75	22	28.5	100	--	60x60	46x46	6	50
13468P601-100S024YANN	100	24	33	122	--	60x60	46x46	6	60

Alternative Fittings:




BLAR Series

Housing:

pressed steel, non-reflection black coated, double ball bearing swivel head, with and without total brake, medium duty version.

Wheel:

high quality polyamide wheel centre, solid non-marking rubber tread, with plain bearing, impact proof, corrosive resistant.



Swivel Castor

Art--No.										KG
13068H101-050S018RANN	50	18	25.5	70	11	--	--	--	--	40
13068H101-075S024RANN	75	24	28.5	100	11	--	--	--	--	50
13068H101-100S024RANN	100	24	33	122	11	--	--	--	--	60

Swivel Castor with Total Brake

Art--No.										KG
13468H101-050S018RANN	50	18	27.5	70	11	--	--	--	--	40
13468H101-075S024RANN	75	24	28.5	100	11	--	--	--	--	50
13468H101-100S024RANN	100	24	33	122	11	--	--	--	--	60

Swivel Castor

Art--No.										KG
13068P601-050S018RANN	50	18	25.5	70	--	60x60	46x46	6	--	40
13068P601-075S024RANN	75	24	28.5	100	--	60x60	46x46	6	--	50
13068P601-100S024RANN	100	24	33	122	--	60x60	46x46	6	--	60

Swivel Castor with Total Brake

Art--No.										KG
13468P601-050S018RANN	50	18	27.5	70	--	60x60	46x46	6	--	40
13468P601-075S024RANN	75	24	28.5	100	--	60x60	46x46	6	--	50
13468P601-100S024RANN	100	24	33	122	--	60x60	46x46	6	--	60

Alternative Fittings:




BLAT Series

Housing:

pressed steel, non-reflection black coated, double ball bearing swivel head, with and without total brake, medium duty version.

Wheel:

high quality polypropylene copolymer wheel centre, TPE tread, with plain bearing, impact proof, corrosive resistant.



Swivel Castor

Art--No.										KG
13068H101-050S018TPNN	50	18	25.5	70	11	--	--	--	--	40
13068H101-075S022TPNN	75	22	28.5	100	11	--	--	--	--	50
13068H101-100S022TPNN	100	22	33	122	11	--	--	--	--	60

Swivel Castor with Total Brake

Art--No.										KG
13468H101-050S018TPNN	50	18	27.5	70	11	--	--	--	--	40
13468H101-075S022TPNN	75	22	28.5	100	11	--	--	--	--	50
13468H101-100S022TPNN	100	22	33	122	11	--	--	--	--	60

Swivel Castor

Art--No.										KG
13068P601-050S018TPNN	50	18	25.5	70	--	60x60	46x46	6	--	40
13068P601-075S022TPNN	75	22	28.5	100	--	60x60	46x46	6	--	50
13068P601-100S022TPNN	100	22	33	122	--	60x60	46x46	6	--	60

Swivel Castor with Total Brake

Art--No.										KG
13468P601-050S018TPNN	50	18	27.5	70	--	60x60	46x46	6	--	40
13468P601-075S022TPNN	75	22	28.5	100	--	60x60	46x46	6	--	50
13468P601-100S022TPNN	100	22	33	122	--	60x60	46x46	6	--	60

Alternative Fittings:




BLATB Series

Housing:

pressed steel, non-reflection black coated, double ball bearing swivel head, with and without total brake, medium duty version.

Wheel:

high quality polypropylene copolymer wheel centre, TPE tread, with precision ball bearing, plastic threadguards, low rolling resistance, impact proof and corrosive resistant.



Swivel Castor

Art--No.									
13068H101-050S018TPBP	50	18	25.5	70	11	--	--	--	40
13068H101-075S024TPBP	75	24	28.5	100	11	--	--	--	50
13068H101-100S024TPBP	100	24	33	122	11	--	--	--	60

Swivel Castor with Total Brake

Art--No.									
13468H101-050S018TPBP	50	18	27.5	70	11	--	--	--	40
13468H101-075S024TPBP	75	24	28.5	100	11	--	--	--	50
13468H101-100S024TPBP	100	24	33	122	11	--	--	--	60

Swivel Castor

Art--No.									
13068P601-050S018TPBP	50	18	25.5	70	--	60x60	46x46	6	40
13068P601-075S024TPBP	75	24	28.5	100	--	60x60	46x46	6	50
13068P601-100S024TPBP	100	24	33	122	--	60x60	46x46	6	60

Swivel Castor with Total Brake

Art--No.									
13468P601-050S018TPBP	50	18	27.5	70	--	60x60	46x46	6	40
13468P601-075S024TPBP	75	24	28.5	100	--	60x60	46x46	6	50
13468P601-100S024TPBP	100	24	33	122	--	60x60	46x46	6	60

Alternative Fittings:




BLAU Series

Housing:

pressed steel, non-reflection black coated, double ball bearing swivel head, with and without total brake, medium duty version.

Wheel:

high quality polyamide wheel centre, non-marking polyurethane tread, with plain bearing, high abrasion resistance, impact proof and corrosive resistant.



Swivel Castor

Art--No.									
13068H101-050S018UANN	50	18	25.5	70	11	--	--	--	40
13068H101-075S025UANN	75	25	28.5	100	11	--	--	--	50
13068H101-100S025UANN	100	25	33	122	11	--	--	--	60

Swivel Castor with Total Brake

Art--No.									
13468H101-050S018UANN	50	18	27.5	70	11	--	--	--	40
13468H101-075S025UANN	75	25	28.5	100	11	--	--	--	50
13468H101-100S025UANN	100	25	33	122	11	--	--	--	60

Swivel Castor

Art--No.									
13068P601-050S018UANN	50	18	25.5	70	--	60x60	46x46	6	40
13068P601-075S025UANN	75	25	28.5	100	--	60x60	46x46	6	50
13068P601-100S025UANN	100	25	33	122	--	60x60	46x46	6	60

Swivel Castor with Total Brake

Art--No.									
13468P601-050S018UANN	50	18	27.5	70	--	60x60	46x46	6	40
13468P601-075S025UANN	75	25	28.5	100	--	60x60	46x46	6	50
13468P601-100S025UANN	100	25	33	122	--	60x60	46x46	6	60

Alternative Fittings:




BLAK Series

Housing:

pressed steel, non-reflection black coated, double ball bearing swivel head, with and without total brake, medium duty version.

Wheel:

high transparent polyurethane, UV resistant, with precision ball bearing, high abrasion resistance, low rolling resistance, impact proof and corrosive resistant.



Swivel Castor

Art--No.									
13068H101-050S018YKNN	50	18	25.5	70	11	--	--	--	40
13068H101-075S024YKCN	75	24	28.5	100	11	--	--	--	50
13068H101-100S024YKCN	100	24	33	122	11	--	--	--	60

Swivel Castor with Total Brake

Art--No.									
13468H101-050S018YKNN	50	18	27.5	70	11	--	--	--	40
13468H101-075S024YKCN	75	24	28.5	100	11	--	--	--	50
13468H101-100S024YKCN	100	24	33	122	11	--	--	--	60

Swivel Castor

Art--No.									
13068P601-050S018YKNN	50	18	25.5	70	--	60x60	46x46	6	40
13068P601-075S024YKCN	75	24	28.5	100	--	60x60	46x46	6	50
13068P601-100S024YKCN	100	24	33	122	--	60x60	46x46	6	60

Swivel Castor with Total Brake

Art--No.									
13468P601-050S018YKNN	50	18	27.5	70	--	60x60	46x46	6	40
13468P601-075S024YKCN	75	24	28.5	100	--	60x60	46x46	6	50
13468P601-100S024YKCN	100	24	33	122	--	60x60	46x46	6	60

Alternative Fittings:




WLAA Series

Housing:

pressed steel, white coated, double ball bearing swivel head, with and without total brake, medium duty version.

Wheel:

high quality polyamide, with plain bearing, high abrasion resistance, low rolling resistance, impact proof and corrosive resistant.



Swivel Castor

Art--No.									
13078H101-050S020YANN	50	20	25.5	70	11	--	--	--	40
13078H101-075S022YANN	75	22	28.5	100	11	--	--	--	50
13078H101-100S024YANN	100	24	33	122	11	--	--	--	60

Swivel Castor with Total Brake

Art--No.									
13478H101-050S020YANN	50	20	27.5	70	11	--	--	--	40
13478H101-075S022YANN	75	22	28.5	100	11	--	--	--	50
13478H101-100S024YANN	100	24	33	122	11	--	--	--	60

Swivel Castor

Art--No.									
13078P601-050S020YANN	50	20	25.5	70	--	60x60	46x46	6	40
13078P601-075S022YANN	75	22	28.5	100	--	60x60	46x46	6	50
13078P601-100S024YANN	100	24	33	122	--	60x60	46x46	6	60

Swivel Castor with Total Brake


Art--No.									
13478P601-050S020YANN	50	20	27.5	70	--	60x60	46x46	6	40
13478P601-075S022YANN	75	22	28.5	100	--	60x60	46x46	6	50
13478P601-100S024YANN	100	24	33	122	--	60x60	46x46	6	60

Alternative Fittings:



WLAT Series

Housing:



pressed steel, non-reflection black coated, double ball bearing swivel head, with and without total brake, medium duty version.

Wheel:

high quality polypropylene copolymer wheel centre, TPE tread, with plain bearing, impact proof, corrosive resistant.

Swivel Castor

Art.-No.									
13078H101-050S018TPNN	50	18	25.5	70	11	--	--	--	40
13078H101-075S022TPNN	75	22	28.5	100	11	--	--	--	50
13078H101-100S022TPNN	100	22	33	122	11	--	--	--	60

Swivel Castor with Total Brake

Art.-No.									
13478H101-050S018TPNN	50	18	27.5	70	11	--	--	--	40
13478H101-075S022TPNN	75	22	28.5	100	11	--	--	--	50
13478H101-100S022TPNN	100	22	33	122	11	--	--	--	60

Swivel Castor

Art.-No.									
13078P601-050S018TPNN	50	18	25.5	70	--	60x60	46x46	6	40
13078P601-075S022TPNN	75	22	28.5	100	--	60x60	46x46	6	50
13078P601-100S022TPNN	100	22	33	122	--	60x60	46x46	6	60

Swivel Castor with Total Brake


Art.-No.									
13478P601-050S018TPNN	50	18	27.5	70	--	60x60	46x46	6	40
13478P601-075S022TPNN	75	22	28.5	100	--	60x60	46x46	6	50
13478P601-100S022TPNN	100	22	33	122	--	60x60	46x46	6	60

Alternative Fittings:



WLAK Series

Housing:



pressed steel, non-reflection black coated, double ball bearing swivel head, with and without total brake, medium duty version.

Wheel:

high transparent polyurethane, UV resistant, with precision ball bearing, high abrasion resistance, low rolling resistance, impact proof and corrosive resistant.

Swivel Castor

Art.-No.									
13078H101-050S018YKNN	50	18	25.5	70	11	--	--	--	40
13078H101-075S024YKCN	75	24	28.5	100	11	--	--	--	50
13078H101-100S024YKCN	100	24	33	122	11	--	--	--	60

Swivel Castor with Total Brake

Art.-No.									
13478H101-050S018YKNN	50	18	27.5	70	11	--	--	--	40
13478H101-075S024YKCN	75	24	28.5	100	11	--	--	--	50
13478H101-100S024YKCN	100	24	33	122	11	--	--	--	60

Swivel Castor

Art.-No.									
13078P601-050S018YKNN	50	18	25.5	70	--	60x60	46x46	6	40
13078P601-075S024YKCN	75	24	28.5	100	--	60x60	46x46	6	50
13078P601-100S024YKCN	100	24	33	122	--	60x60	46x46	6	60


Swivel Castor with Total Brake

Art.-No.									
13478P601-050S018YKNN	50	18	27.5	70	--	60x60	46x46	6	40
13478P601-075S024YKCN	75	24	28.5	100	--	60x60	46x46	6	50
13478P601-100S024YKCN	100	24	33	122	--	60x60	46x46	6	60

Alternative Fittings:



DAA Series



Housing:

pressed steel, zinc plated, double ball bearing swivel head, with and without total brake (with only wheel brake for castor in size 36mm), double wheel version.

Wheel:

high quality polyamide, with plain bearing, high abrasion resistance, low rolling resistance, impact proof and corrosive resistant.

Art--No.						bearing type
036X015YANN	36	15	22	8	30	
050X020YANN	50	20	22	8	40	
075X022YANN	75	22	29	8	50	

Swivel Castor

Art--No.									
13029H101--036D015 ANN	36	15	30	54	10	--	--	--	50
13029H101--050D020 ANN	50	20	25	73	10	--	--	--	60
13029H101--075D022 ANN	75	22	35	98.5	10	--	--	--	80

Swivel Castor with Total Brake

Art--No.									
13329H101--036D015 ANN	36	15	24	54	10	--	--	--	50
13429H101--050D020 ANN	50	20	26	73	10	--	--	--	60
13429H101--075D022 ANN	75	22	32	98.5	10	--	--	--	80

Swivel Castor

Art--No.									
13029P601--036D015 ANN	36	15	30	54	-	60x60	46x46	6	50
13029P601--050D020 ANN	50	20	25	73	-	60x60	46x46	6	60
13029P601--075D022 ANN	75	22	35	101	-	60x60	46x46	6	80


Swivel Castor with Total Brake

Art--No.									
13329P601--036D015 ANN	36	15	24	54	-	60x60	46x46	6	50
13429P601--050D020 ANN	50	20	26	73	-	60x60	46x46	6	60
13429P601--075D022 ANN	75	22	32	101	-	60x60	46x46	6	80

Alternative Fittings:



DAR Series



Housing:

pressed steel, zinc plated, double ball bearing swivel head, with and without total brake, double wheel version.

Wheel:

high quality polyamide wheel centre, solid non-marking grey rubber tread, with plain bearing, impact proof, corrosive resistant.

Art--No.						bearing type
050X018RANN	50	18	21	8	40	
075X024RANN	75	24	28	8	50	

Swivel Castor

Art--No.									
13029H101--050D018RANN	50	18	25	73	10	-	-	-	60
13029H101--075D024RANN	75	24	35	98.5	10	--	--	--	80

Swivel Castor with Total Brake

Art--No.									
13429H101--050D018RANN	50	18	26	73	10	-	-	-	60
13429H101--075D024RANN	75	24	32	98.5	10	-	-	--	80

Swivel Castor

Art--No.									
13029P601--050D018RANN	50	18	25	73	-	60x60	46x46	6	60
13029P601--075D024RANN	75	24	35	101	-	60x60	46x46	6	80


Swivel Castor with Total Brake

Art--No.									
13429P601--050D018RANN	50	18	26	73	-	60x60	46x46	6	60
13429P601--075D024RANN	75	24	32	101	--	60x60	46x46	6	80

Alternative Fittings:



DARB Series




Housing:

pressed steel, zinc plated, double ball bearing swivel head, with and without total brake, double wheel version.

Wheel:

high quality polypropylene copolymer wheel centre, solid non-marking rubber grey tread, with flange bearing, low rolling resistance, impact proof and corrosive resistant.

DAT Series



Housing:

pressed steel, zinc plated, double ball bearing swivel head, with and without total brake, double wheel version.

Wheel:

high quality polypropylene copolymer wheel centre, TPE tread, with plain bearing, impact proof, corrosive resistant.

Art--No.						bearing type
050X018RPCN	50	18	23	6	40	
075X022RPCN	75	22	30	6	50	

Swivel Castor

Art--No.									
13029H101--050D018RPCN	50	18	25	73	10	-	-	-	60
13029H101--075D022RPCN	75	22	35	98.5	10	--	--	--	80

Swivel Castor with Total Brake

Art--No.									
13429H101--050D018RPCN	50	18	26	73	10	-	-	-	60
13429H101--075D022RPCN	75	22	32	98.5	10	--	--	--	80

Swivel Castor

Art--No.									
13029P601--050D018RPCN	50	18	25	73	-	60x60	46x46	6	60
13029P601--075D022RPCN	75	22	35	101	--	60x60	46x46	6	80

Swivel Castor with Total Brake

Art--No.									
13429P601--050D018RPCN	50	18	26	73	-	60x60	46x46	6	60
13429P601--075D022RPCN	75	22	32	101	--	60x60	46x46	6	80

Alternative Fittings:



Art--No.						bearing type
050X018TPNN	50	18	21	8	40	
075X022TPNN	75	22	28	8	50	

Swivel Castor

Art--No.									
13029H101--050D018TPNN	50	18	25	73	10	-	-	-	60
13029H101--075D022TPNN	75	22	35	98.5	10	--	--	--	80

Swivel Castor with Total Brake

Art--No.									
13429H101--050D018TPNN	50	18	26	73	10	-	-	-	60
13429H101--075D022TPNN	75	22	32	98.5	10	--	--	--	80

Swivel Castor

Art--No.									
13029P601--050D018TPNN	50	18	25	73	-	60x60	46x46	6	60
13029P601--075D022TPNN	75	22	35	101	--	60x60	46x46	6	80

Swivel Castor with Total Brake

Art--No.									
13429P601--050D018TPNN	50	18	26	73	-	60x60	46x46	6	60
13429P601--075D022TPNN	75	22	32	101	--	60x60	46x46	6	80

Alternative Fittings:




DATB Series

Housing:

pressed steel, zinc plated, double ball bearing swivel head, with and without total brake, double wheel version.

Wheel:

high quality polypropylene copolymer wheel centre, TPE tread, with precision ball bearing, plastic threadguards, low rolling resistance, impact proof and corrosive resistant.



Art--No.						bearing type
050X018TPBP	50	18	23	6	40	
075X024TPBP	75	24	30	6	50	

Swivel Castor

Art--No.									
13029H101--050D018TPB	50	18	25	73	10	-	-	-	60
13029H101--075D024TPB	75	24	35	98.5	10	--	--	--	80

Swivel Castor with Total Brake

Art--No.									
13429H101--050D018TPB	50	18	26	73	10	-	-	-	60
13429H101--075D024TPB	75	24	32	98.5	10	--	--	--	80

Swivel Castor

Art--No.									
13029P601--050D018TPB	50	18	25	73	-	60x60	46x46	6	60
13029P601--075D024TPB	75	24	35	101	--	60x60	46x46	6	80

Swivel Castor with Total Brake

Art--No.									
13429P601--050D018TPB	50	18	26	73	-	60x60	46x46	6	60
13429P601--075D024TPB	75	24	32	101	--	60x60	46x46	6	80

Alternative Fittings:




DAU Series

Housing:

pressed steel, zinc plated, double ball bearing swivel head, with and without total brake, double wheel version.

Wheel:

high quality polyamide wheel centre, non-marking polyurethane tread, with plain bearing, high abrasion resistance, impact proof and corrosive resistant.



Art--No.						bearing type
050X018UANN	50	18	21	8	40	
075X025UANN	75	25	29	8	50	

Swivel Castor

Art--No.									
13029H101--050D018UANN	50	18	25	73	10	-	-	-	60
13029H101--075D025UANN	75	25	35	98.5	10	--	--	--	80

Swivel Castor with Total Brake

Art--No.									
13429H101--050D018UANN	50	18	26	73	10	-	-	-	60
13429H101--075D025UANN	75	25	32	98.5	10	--	--	--	80

Swivel Castor

Art--No.									
13029P601--050D018UANN	50	18	25	73	-	60x60	46x46	6	60
13029P601--075D025UANN	75	25	35	101	--	60x60	46x46	6	80

Swivel Castor with Total Brake

Art--No.									
13429P601--050D018UANN	50	18	26	73	-	60x60	46x46	6	60
13429P601--075D025UANN	75	25	32	101	--	60x60	46x46	6	80

Alternative Fittings:




HAA Series

Housing:

pressed steel, zinc plated, double ball bearing swivel head with hardened ball race, with and without total brake, heavy duty ver-sion

Wheel:

nature polyamide, with plain bearing, high abrasion resistance, low rolling resistance, impact proof and corrosive resistant.



Art--No.						KG	bearing type
080X032YAPN	80	32	35	8	70		
100X032YAPN	100	32	35	8	80		
125X032YAPN	125	32	35	8	100		
150X032YAPN	150	32	35	8	110		

Swivel Castor

Art--No.										KG
24025H101--080S032 APN	80	32	34	111	10	--	--	--	--	70
24025H101--100S032 APN	100	32	38	135	10	--	--	--	--	80
24025H101--125S032 APN	125	32	41.5	160	10	--	--	--	--	100
24025H101--150S032 APN	150	32	43	184	10	--	--	--	--	110

Swivel Castor with Total Brake

Art--No.										KG
24425H101--080S032 APN	80	32	34	111	10	--	--	--	--	70
24425H101--100S032 APN	100	32	40	135	10	--	--	--	--	80
24425H101--125S032 APN	125	32	37	160	10	--	--	--	--	100
24425H101--150S032 APN	150	32	32	184	10	--	--	--	--	110

Swivel Castor

Art--No.										
24025P671--080S032 APN	80	32	34	111	--	77x67	$\frac{61.5}{56} \times \frac{51.5}{46.5}$	8.5	70	
24025P671--100S032 APN	100	32	38	135	--	77x67	$\frac{61.5}{56} \times \frac{51.5}{46.5}$	8.5	80	
24025P671--125S032 APN	125	32	41.5	160	--	77x67	$\frac{61.5}{56} \times \frac{51.5}{46.5}$	8.5	100	
24025P671--150S032 APN	150	32	43	184	--	77x67	$\frac{61.5}{56} \times \frac{51.5}{46.5}$	8.5	110	

Swivel Castor with Total Brake

Art--No.										
24425P671--080S032 APN	80	32	34	111	--	77x67	$\frac{61.5}{56} \times \frac{51.5}{46.5}$	8.5	70	
24425P671--100S032 APN	100	32	40	135	--	77x67	$\frac{61.5}{56} \times \frac{51.5}{46.5}$	8.5	80	
24425P671--125S032 APN	125	32	37	160	--	77x67	$\frac{61.5}{56} \times \frac{51.5}{46.5}$	8.5	100	
24425P671--150S032 APN	150	32	32	184	--	77x67	$\frac{61.5}{56} \times \frac{51.5}{46.5}$	8.5	110	

Rigid Castor

Art--No.										
20025P671--080S032 APN	80	32	--	112	--	77x67	$\frac{61.5}{56} \times \frac{51.5}{46.5}$	8.5	70	
20025P671--100S032 APN	100	32	--	137	--	77x67	$\frac{61.5}{56} \times \frac{51.5}{46.5}$	8.5	80	
20025P671--125S032 APN	125	32	--	161.5	--	77x67	$\frac{61.5}{56} \times \frac{51.5}{46.5}$	8.5	100	
20025P671--150S032 APN	150	32	--	187.5	--	77x67	$\frac{61.5}{56} \times \frac{51.5}{46.5}$	8.5	110	


HAE Series

Housing:

pressed steel, zinc plated, double ball bearing swivel head with hardened ball race, with and without total brake, heavy duty ver-sion.

Wheel:

high quality polyamide wheel centre, super elastic rubber tread, with roller bearing, low rolling resistance, impact proof and corrosive resistant.



Art--No.						KG	bearing type
080X032EARN	80	32	35	8	70		
100X032EARN	100	32	35	8	80		
125X032EARN	125	32	35	8	100		
150X032EARN	150	32	35	8	110		

Swivel Castor

Art--No.										
24025H101--080S032EARN	80	32	34	111	10	--	--	-	70	
24025H101--100S032EARN	100	32	38	135	10	--	--	-	80	
24025H101--125S032EARN	125	32	41.5	160	10	--	--	-	100	
24025H101--150S032EARN	150	32	43	184	10	--	--	-	110	

Swivel Castor with Total Brake

Art--No.									
24425H101--080S032EARN	80	32	34	111	10	--	--	--	70
24425H101--100S032EARN	100	32	40	135	10	--	--	--	80
24425H101--125S032EARN	125	32	37	160	10	--	--	--	100
24425H101--150S032EARN	150	32	32	184	10	--	--	--	110

Swivel Castor

Art--No.										
24025P671--080S032EARN	80	32	34	111	--	77x67	$\frac{61.5}{56} \times \frac{51.5}{46.5}$	8.5	70	
24025P671--100S032EARN	100	32	38	135	--	77x67	$\frac{61.5}{56} \times \frac{51.5}{46.5}$	8.5	80	
24025P671--125S032EARN	125	32	41.5	160	--	77x67	$\frac{61.5}{56} \times \frac{51.5}{46.5}$	8.5	100	
24025P671--150S032EARN	150	32	43	184	--	77x67	$\frac{61.5}{56} \times \frac{51.5}{46.5}$	8.5	110	


Swivel Castor with Total Brake

Art--No.										
24425P671--080S032EARN	80	32	34	111	--	77x67	$\frac{61.5}{56} \times \frac{51.5}{46.5}$	8.5	70	
24425P671--100S032EARN	100	32	40	135	--	77x67	$\frac{61.5}{56} \times \frac{51.5}{46.5}$	8.5	80	
24425P671--125S032EARN	125	32	37	160	--	77x67	$\frac{61.5}{56} \times \frac{51.5}{46.5}$	8.5	100	
24425P671--150S032EARN	150	32	32	184	--	77x67	$\frac{61.5}{56} \times \frac{51.5}{46.5}$	8.5	110	

Rigid Castor

Art--No.										
20025P671--080S032EARN	80	32	-	112	--	77x67	$\frac{61.5}{56} \times \frac{51.5}{46.5}$	8.5	70	
20025P671--100S032EARN	100	32	-	137	--	77x67	$\frac{61.5}{56} \times \frac{51.5}{46.5}$	8.5	80	
20025P671--125S032EARN	125	32	-	161.5	--	77x67	$\frac{61.5}{56} \times \frac{51.5}{46.5}$	8.5	100	
20025P671--150S032EARN	150	32	-	187.5	--	77x67	$\frac{61.5}{56} \times \frac{51.5}{46.5}$	8.5	110	

HAT Series



Housing:

pressed steel, zinc plated, double ball bearing swivel head with hardened ball race, with and without total brake, heavy duty ver-sion.

Wheel:

high quality polypropylene copolymer wheel centre, TPE tread, with plain bearing, impact proof, corrosive resistant.

Art--No.						KG	bearing type
080X028TPPN	80	28	35	8	70		
100X030TPPN	100	30	35	8	80		
125X030TPPN	125	30	35	8	100		
150X030TPPN	150	30	35	8	110		

Swivel Castor

Art--No.									KG
24025H101--080S028TPP	80	28	34	111	10	--	--	--	70
24025H101--100S030TPPN	100	30	38	135	10	--	--	--	80
24025H101--125S030TPPN	125	30	41.5	160	10	--	--	--	100
24025H101--150S030TPPN	150	30	43	184	10	--	--	--	110

Swivel Castor with Total Brake

Art--No.									KG
24425H101--080S028TPP	80	28	34	111	10	--	--	--	70
24425H101--100S030TPPN	100	30	40	135	10	--	--	--	80
24425H101--125S030TPPN	125	30	37	160	10	--	--	--	100
24425H101--150S030TPPN	150	30	32	184	10	--	--	--	110

Swivel Castor

Art--No.									KG
24025P671--080S028TPP	80	28	34	111	--	77x67	61.5 56 x 51.5 46.5	8.5	70
24025P671--100S030TPPN	100	30	38	135	--	77x67	61.5 56 x 51.5 46.5	8.5	80
24025P671--125S030TPPN	125	30	41.5	160	--	77x67	61.5 56 x 51.5 46.5	8.5	100
24025P671--150S030TPPN	150	30	43	184	--	77x67	61.5 56 x 51.5 46.5	8.5	110


Swivel Castor with Total Brake

Art--No.									KG
24425P671--080S028TPPN	80	28	34	111	--	77x67	61.5 56 x 51.5 46.5	8.5	70
24425P671--100S030TPPN	100	30	40	135	--	77x67	61.5 56 x 51.5 46.5	8.5	80
24425P671--125S030TPPN	125	30	37	160	--	77x67	61.5 56 x 51.5 46.5	8.5	100
24425P671--150S030TPPN	150	30	32	184	--	77x67	61.5 56 x 51.5 46.5	8.5	110

Rigid Castor

Art--No.									KG
20025P671--080S028TPPN	80	28	--	112	--	77x67	61.5 56 x 51.5 46.5	8.5	70
20025P671--100S030TPPN	100	30	--	137	--	77x67	61.5 56 x 51.5 46.5	8.5	80
20025P671--125S030TPPN	125	30	--	161.5	--	77x67	61.5 56 x 51.5 46.5	8.5	100
20025P671--150S030TPPN	150	30	--	187.5	--	77x67	61.5 56 x 51.5 46.5	8.5	110

HATB Series



Housing:

pressed steel, zinc plated, double ball bearing swivel head with hardened ball race, with and without total brake, heavy duty version.

Wheel:

high quality polypropylene copolymer wheel centre, TPE tread, with precision ball bearing, plastic threadguards, low rolling resistance, impact proof and corrosive resistant.

Art--No.						KG	bearing type
080X032TPBP	80	32	36	8	70		
100X032TPBP	100	32	36	8	80		
125X032TPBP	125	32	36	8	100		
150X032TPBP	150	32	36	8	110		

Swivel Castor

Art--No.									KG
24025H101--080S032TPB	80	32	34	111	10	--	--	--	70
24025H101--100S032TPB	100	32	38	135	10	--	--	--	80
24025H101--125S032TPB	125	32	41.5	160	10	--	--	--	100
24025H101--150S032TPB	150	32	43	184	10	--	--	--	110

Swivel Castor with Total Brake

Art--No.									KG
24425H101--080S032TPB	80	32	34	111	10	--	--	--	70
24425H101--100S032TPB	100	32	40	135	10	--	--	--	80
24425H101--125S032TPB	125	32	37	160	10	--	--	--	100
24425H101--150S032TPB	150	32	32	184	10	--	--	--	110

Swivel Castor

Art--No.									KG
24025P671--080S032TPB	80	32	34	111	--	77x67	61.5 56 x 51.5 46.5	8.5	70
24025P671--100S032TPB	100	32	38	135	--	77x67	61.5 56 x 51.5 46.5	8.5	80
24025P671--125S032TPB	125	32	41.5	160	--	77x67	61.5 56 x 51.5 46.5	8.5	100
24025P671--150S032TPB	150	32	43	184	--	77x67	61.5 56 x 51.5 46.5	8.5	110


Swivel Castor with Total Brake

Art--No.									KG
24425P671--080S032TPB	80	32	34	111	--	77x67	61.5 56 x 51.5 46.5	8.5	70
24425P671--100S032TPB	100	32	40	135	--	77x67	61.5 56 x 51.5 46.5	8.5	80
24425P671--125S032TPB	125	32	37	160	--	77x67	61.5 56 x 51.5 46.5	8.5	100
24425P671--150S032TPB	150	32	32	184	--	77x67	61.5 56 x 51.5 46.5	8.5	110

Rigid Castor

Art--No.									KG
20025P671--080S032TPB	80	32	--	112	--	77x67	61.5 56 x 51.5 46.5	8.5	70
20025P671--100S032TPB	100	32	--	137	--	77x67	61.5 56 x 51.5 46.5	8.5	80
20025P671--125S032TPB	125	32	--	161.5	--	77x67	61.5 56 x 51.5 46.5	8.5	100
20025P671--150S032TPB	150	32	--	187.5	--	77x67	61.5 56 x 51.5 46.5	8.5	110

HAUB Series



Housing:

pressed steel, zinc plated, double ball bearing swivel head with hardened ball race, with and without total brake, heavy duty version.

Wheel:

high quality polypropylene copolymer wheel centre, non-marking polyurethane tread, with precision ball bearing, plastic threadguards, high abrasion resistance, low rolling resistance, impact proof and corrosive resistant.

Art--No.						bearing type
080X032UPBP	80	32	36	8	70	
100X032UPBP	100	32	36	8	80	
125X032UPBP	125	32	36	8	100	
150X032UPBP	150	32	36	8	110	

Swivel Castor

Art--No.									
24025H101--080S032UPB	80	32	34	110	10	--	--	--	70
24025H101--100S032UPB	100	32	38	135	10	--	--	--	80
24025H101--125S032UPB	125	32	41.5	160	10	--	--	--	100
24025H101--150S032UPB	150	32	43	184	10	--	--	--	110

Swivel Castor with Total Brake

Art--No.									
24425H101--080S032UPB	80	32	34	111	10	--	--	--	70
24425H101--100S032UPB	100	32	40	135	10	--	--	--	80
24425H101--125S032UPB	125	32	37	160	10	--	--	--	100
24425H101--150S032UPB	150	32	32	184	10	--	--	--	110

Swivel Castor

Art--No.									
24025P671--080S032UPB	80	32	34	111	--	77x67	$\frac{61.5}{56} \times \frac{51.5}{46.5}$	8.5	70
24025P671--100S032UPB	100	32	38	135	--	77x67	$\frac{61.5}{56} \times \frac{51.5}{46.5}$	8.5	80
24025P671--125S032UPB	125	32	41.5	160	--	77x67	$\frac{61.5}{56} \times \frac{51.5}{46.5}$	8.5	100
24025P671--150S032UPB	150	32	43	184	--	77x67	$\frac{61.5}{56} \times \frac{51.5}{46.5}$	8.5	110

Swivel Castor with Total Brake

Art--No.									
24425P671--080S032UPB	80	32	34	111	--	77x67	$\frac{61.5}{56} \times \frac{51.5}{46.5}$	8.5	70
24425P671--100S032UPB	100	32	40	135	--	77x67	$\frac{61.5}{56} \times \frac{51.5}{46.5}$	8.5	80
24425P671--125S032UPB	125	32	37	160	--	77x67	$\frac{61.5}{56} \times \frac{51.5}{46.5}$	8.5	100
24425P671--150S032UPB	150	32	32	184	--	77x67	$\frac{61.5}{56} \times \frac{51.5}{46.5}$	8.5	110


Rigid Castor

Art--No.									
20025P671--080S032UPB	80	32	--	112	--	77x67	$\frac{61.5}{56} \times \frac{51.5}{46.5}$	8.5	70
20025P671--100S032UPB	100	32	--	137	--	77x67	$\frac{61.5}{56} \times \frac{51.5}{46.5}$	8.5	80
20025P671--125S032UPB	125	32	--	161.5	--	77x67	$\frac{61.5}{56} \times \frac{51.5}{46.5}$	8.5	100
20025P671--150S032UPB	150	32	--	187.5	--	77x67	$\frac{61.5}{56} \times \frac{51.5}{46.5}$	8.5	110






Foroll Shopping Trolley And Walkway Castor

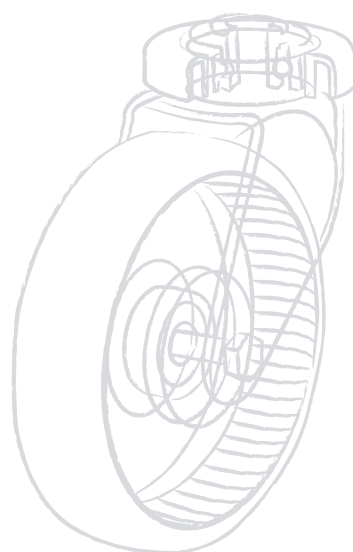

MT Series

Housing:

pressed steel, zinc plated, double ball bearing swivel head.



Wheel:

high quality polypropylene copolymer wheel centre, TPE tread, with plain bearing, impact proof, corrosive resistant.

Art--No.						
24026H121--100S030TPPN	100	30	32	131.5	12	80
24026H121--125S030TPPN	125	30	35	156	12	100

Wheel:

high quality polypropylene copolymer wheel centre, TPE tread, with precision ball bearing, plastic threadguards, low rolling resistance, impact proof and corrosive resistant.

Art--No.						
24026H121--100S032TPB	100	32	32	131.5	12	80
24026H121--125S032TPB	125	32	35	156	12	100

Wheel:

high quality polypropylene copolymer wheel centre, non-marking polyurethane tread, with precision ball bearing, plastic threadguards, high abrasion resistance, low rolling resistance, impact proof and corrosive resistant.

Art--No.						
24026H121--100S032UPB	100	32	32	131.5	12	80
24026H121--125S032UPB	125	32	35	156	12	100

MS Series

Housing:

pressed steel, zinc plated, double ball bearing swivel head, with locking segment for moving walkways.


Wheel:

high quality polyamide wheel centre, non-marking polyurethane tread, with black automatic rubber brake ring for moving walkways, with flange bearing, steel threadguards, low rolling resistance, impact proof and corrosive resistant.

Art--No.						
24126H121--125S032UAC	125	32	46	151	12	50



BT Series



Housing:


pressed steel, zinc plated, swivel head with pressed-in precision ball bearing, with PU cover and protection bumper.

Wheel:

high quality polypropylene copolymer wheel centre, TPE tread, with precision ball bearing, plastic threadguards, low rolling resistance, impact proof and corrosive resistant.

Art--No.						
27026H121--100S030TPB	100	30	34	127	12	80
27026H121--125S030TPB	125	30	38	153.5	12	100

BS Series



Housing:

made of pressed steel, zinc plated, swivel head with pressed-in precision ball bearing, with PU cover and protection bumper.

Wheel:

of high quality polyamide wheel centre, non-marking polyurethane tread, with polyurethane brake segment for moving walkways, with precision ball bearing, plastic threadguards, low rolling resistance, impact proof and corrosive resistant.


Art--No.						
27126H121--100S031UAS	100	31	34	127	12	40
27126H121--125S031UAS	125	31	38	153.5	12	50

Alternative Fittings:






Foroll Medical Castor

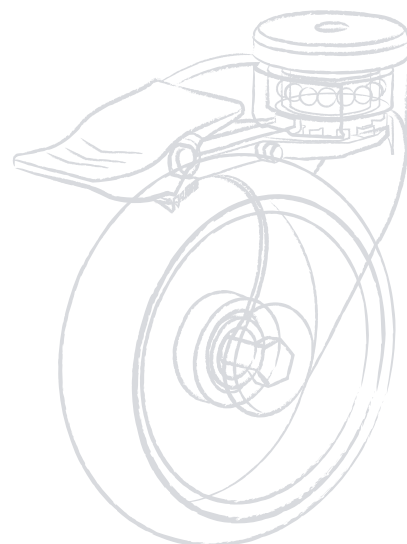

BG Series



Housing:

pressed steel, zinc coated, precision ball bearing swivel head, with and without total brake.

Wheel:

high quality polypropylene copolymer wheel centre, TPE tread, with precision ball bearing, plastic threadguards, low rolling resistance, impact proof and corrosive resistant.


Art--No.	Ø	32	38	148	12		KG
27025H121--100S032TPB	100	32	38	148	12	-	90
27025H121--125S032TPB	125	32	43	171.5	12	-	100
27025H121--150S032TPB	150	32	51	198	12	-	120
Art--No.	Ø	32	38	148	12		KG
27425H121--100S032TPB	100	32	38	148	12	total brake	90
27425H121--125S032TPB	125	32	43	171.5	12	total brake	100
27425H121--150S032TPB	150	32	51	198	12	total brake	120

Wheel:

high quality polypropylene copolymer wheel centre, non-marking polyurethane tread, with precision ball bearing, plastic threadguards, high abrasion resistance, low rolling resistance, impact proof and corrosive resistant.

Art--No.	Ø	32	38	148	12		KG
27025H121--100S032UPB	100	32	38	148	12	--	90
27025H121--125S032UPB	125	32	43	171.5	12	--	100
27025H121--150S032UPB	150	32	51	198	12	--	120
Art--No.	Ø	32	38	148	12		KG
27425H121--100S032UPB	100	32	38	148	12	total brake	90
27425H121--125S032UPB	125	32	43	171.5	12	total brake	100
27425H121--150S032UPB	150	32	51	198	12	total brake	120

NB Series



Housing:

pressed steel, zinc plated, double ball bearing swivel head with hardened ball race, with and without total brake, heavy duty version.

Wheel:

high quality polypropylene copolymer wheel centre, TPE tread, with precision ball bearing, plastic threadguards, low rolling resistance, impact proof and corrosive resistant.

Art--No.	Ø	32	41.5	107	11				KG
23424H101-075S032TPBP	75	32	41.5	107	11	--	--	--	100
23424H101-100S032TPBP	100	32	38	132	11	--	--	--	100



Housing:

made of pressed steel, zinc plated, double ball bearing swivel head, with central, total or directional lock system.

Wheel:

high quality polypropylene copolymer wheel centre, TPE tread, with precision ball bearing, plastic threadguards, low rolling resistance, impact proof and corrosive resistant.

Art--No.							
24624L881-100S032TPBP	100	32	38	143	28x88	central & total lock	80
24624L881-125S032TPBP	125	32	43.5	161	28x88	central & total lock	100
24624L881-150S032TPBP	150	32	51	183.5	28x88	central & total lock	120

Art--No.							
24724L881-100S032TPBP	100	32	38	143	28x88	central, total & directional lock	80
24724L881-125S032TPBP	125	32	43.5	161	28x88	central, total & directional lock	100
24724L881-150S032TPBP	150	32	51	183.5	28x88	central, total & directional lock	120

Art--No.							
24624L961-100S032TPBP	100	32	38	143	28x96	central & total lock	80
24624L961-125S032TPBP	125	32	43.5	161	28x96	central & total lock	100
24624L961-150S032TPBP	150	32	51	183.5	28x96	central & total lock	120

Art--No.							
24724L961-100S032TPBP	100	32	38	143	28x96	central, total & directional lock	80
24724L961-125S032TPBP	125	32	43.5	161	28x96	central, total & directional lock	100
24724L961-150S032TPBP	150	32	51	183.5	28x96	central, total & directional lock	120

Wheel:



high quality polypropylene copolymer wheel centre, non-marking polyurethane tread, with precision ball bearing, plastic threadguards, high abrasion resistance, low rolling resistance, impact proof and corrosive resistant.

Art--No.							
24624L881-100S032UPBP	100	32	38	143	28x88	central & total lock	80
24624L881-125S032UPBP	125	32	43.5	161	28x88	central & total lock	100
24624L881-150S032UPBP	150	32	51	183.5	28x88	central & total lock	120

Art--No.							
24724L881-100S032UPBP	100	32	38	143	28x88	central, total & directional lock	80
24724L881-125S032UPBP	125	32	43.5	161	28x88	central, total & directional lock	100
24724L881-150S032UPBP	150	32	51	183.5	28x88	central, total & directional lock	120

Art--No.							
24624L961-100S032UPBP	100	32	38	143	28x96	central & total lock	80
24624L961-125S032UPBP	125	32	43.5	161	28x96	central & total lock	100
24624L961-150S032UPBP	150	32	51	183.5	28x96	central & total lock	120

Art--No.							
24724L961-100S032UPBP	100	32	38	143	28x96	central, total & directional lock	80
24724L961-125S032UPBP	125	32	43.5	161	28x96	central, total & directional lock	100
24724L961-150S032UPBP	150	32	51	183.5	28x96	central, total & directional lock	120

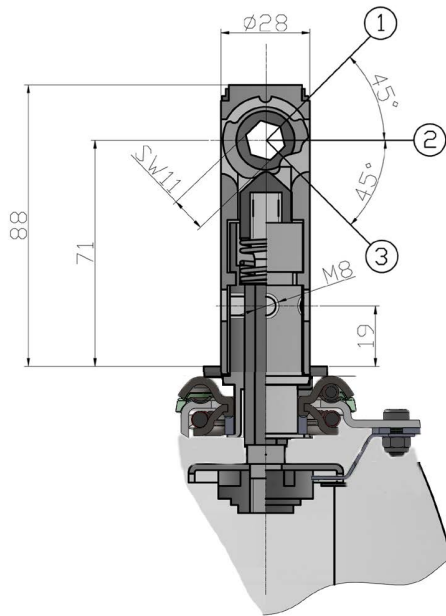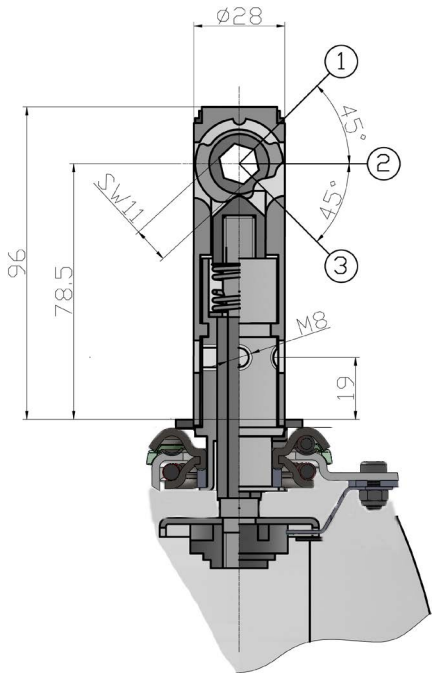

- ① Motion straight ahead (only when equipped with directional locking brake mode)
- ② Changes of direction: free mobility of all castors
- ③ Full locking of all four castors

CLC Series

Housing:

pressed steel, zinc plated, double ball bearing swivel head, with central, total or directional lock system, with fully-sealed plastic cover.

Wheel:

high quality polypropylene copolymer wheel centre, TPE tread, with precision ball bearing, plastic thread-guards, low rolling resistance, impact proof and corrosive resistant.

Art-No.							KG
24698L351-125S044TPBP	125	44	43.5	162	32x50	central & total lock	150
24698L351-150S044TPBP	150	44	51	185	32x50	central & total lock	150
24698L351-200S044TPBP	200	44	64	232	32x50	central & total lock	150

Art-No.							KG
24698L961-125S044TPBP	125	44	43.5	162	28x96	central & total lock	150
24698L961-150S044TPBP	150	44	51	185	28x96	central & total lock	150
24698L961-200S044TPSP	200	44	64	232	28x96	central & total lock	150

Wheel:

high quality polypropylene copolymer wheel centre, non-marking polyurethane tread, with precision ball bearing, plastic threadguards, high abrasion resistance, low rolling resistance, impact proof and corrosive resistant.

Art-No.							KG
24698L351-125S044UABP	125	44	43.5	162	32x50	central & total lock	150
24698L351-150S044UABP	150	44	51	185	32x50	central & total lock	150
24698L351-200S044UASP	200	44	64	232	32x50	central & total lock	150

Art-No.							KG
24698L961-125S044UABP	125	44	43.5	162	28x96	central & total lock	150
24698L961-150S044UABP	150	44	51	185	28x96	central & total lock	150
24698L961-200S044UASP	200	44	64	232	28x96	central & total lock	150

CLCD Series

Housing:

pressed steel, zinc plated, double ball bearing swivel head, with central, total or directional lock system, with fully-sealed plastic cover.

Wheel:

high quality polypropylene copolymer wheel centre, TPE tread, with precision ball bearing, plastic thread-guards, low rolling resistance, impact proof and corrosive resistant.

Art-No.							KG
24698L351-125D022TPBP	125	22	43.5	162	32x50	central & total lock	150
24698L351-150D022TPBP	150	22	51	185	32x50	central & total lock	150
24798L351-125D022TPBP	125	22	43.5	162	32x50	central, total & directional lock	150
24798L351-150D022TPBP	150	22	51	185	32x50	central, total & directional lock	150



Art-No.							KG
24698L961-125D022TPBP	125	22	43.5	162	28x96	central & total lock	150
24698L961-150D022TPBP	150	22	51	185	28x96	central & total lock	150
24798L961-125D022TPBP	125	22	43.5	162	28x96	central, total & directional lock	150
24798L961-150D022TPBP	150	22	51	185	28x96	central, total & directional lock	150

Wheel:

high quality polypropylene copolymer wheel centre, non-marking polyurethane tread, with precision ball bearing, plastic threadguards, high abrasion resistance, low rolling resistance, impact proof and corrosive resistant.

Art-No.							KG
24698L351-125D022UABP	125	22	43.5	162	32x50	central & total lock	150
24698L351-150D022UABP	150	22	51	185	32x50	central & total lock	150
24798L351-125D022UABP	125	22	43.5	162	32x50	central, total & directional lock	150
24798L351-150D022UABP	150	22	51	185	32x50	central, total & directional lock	150

Art-No.							KG
24698L961-125D022UABP	125	22	43.5	162	28x96	central & total lock	150
24698L961-150D022UABP	150	22	51	185	28x96	central & total lock	150
24798L961-125D022UABP	125	22	43.5	162	28x96	central, total & directional lock	150
24798L961-150D022UABP	150	22	51	185	28x96	central, total & directional lock	150

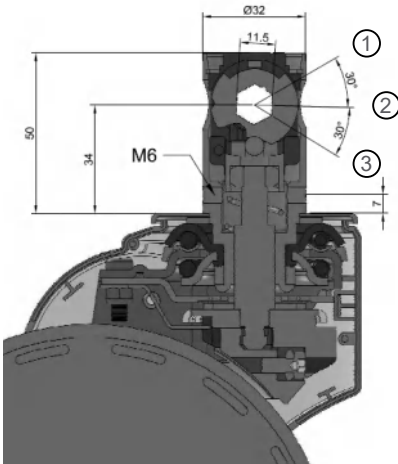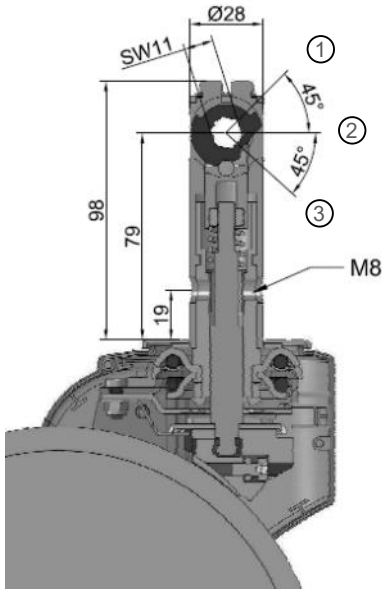


- ① Motion straight ahead (only when equipped with directional locking brake mode)
- ② Changes of direction: free mobility of all castors
- ③ Full locking of all four castors

TF Series

Housing:

pressed steel, chrome coated, precision ball bearing swivel head, with and without total brake.



Wheel:

high quality polypropylene copolymer wheel centre, TPE tread, with precision ball bearing, plastic threadguards, low rolling resistance, impact proof and corrosive resistant.

Art-No.						
27026H121- 150S045TPBP	150	45	43	189	12	200
27426H121- 200S045TPBP	200	45	51	235	12	250

Art-No.						
27426H121- 150S045TPBP	150	45	43	189	12	200
27426H121- 200S045TPBP	200	45	48	235	12	250

Wheel:

high quality polypropylene copolymer wheel centre, soft polyurethane foamed tread, with precision ball bearing, puncture proof, high abrasion resistance, impact proof and corrosive resistant.

Art-No.						
27026H121-200S045FPSN	200	45	51	235	12	80
27426H121-200S045FPSN	200	45	48	235	12	80

PL Series

Housing:

fiber-glass reinforced nylon 6, precision ball bearing swivel head, with or without directional and total combination brake.

Wheel:

high quality polypropylene copolymer wheel centre, non-marking polyurethane tread, with precision ball bearing, plastic threadguards, high abrasion resistance, low rolling resistance, impact proof and corrosive resistant.

Artf No.						
57006H121- 100S032UPBP	100	32	35	135.5	12	90
57006H121- 125S032UPBP	125	32	39	164	12	100

Art--No.						
57406H121- 100S032UPBP	100	32	35	135.5	12	total brake 90
57406H121- 125S032UPBP	125	32	39	164	12	total brake 100

Art-No.						
57007H121-100S032UPBP	100	32	38	140.5	12	-- 90

Art--No.						
57807H121-100S032UPBP	100	32	38	140.5	12	total & directional brake 90

DP Series

Housing:

made of fiber-glass reinforced nylon 6, double precision ball bearings swivel head, with and without total brake

Wheel:


high quality polypropylene copolymer wheel centre, TPE tread, with precision ball bearing, low rolling resistance, impact proof and corrosive resistant

Art-No.						
57001H120-075D015TPSP	75	2x15	20	86	12.5	-- 70
57001H120-100D020TPSP	100	2x20	32	124	12.5	-- 90
57001H120-125D020TPSP	125	2x20	43	143	12.5	-- 125


Art-No.						
57401H120-075D015TPSP	75	2x15	20	86	12.5	total brake 70
57401H120-100D020TPSP	100	2x20	32	124	12.5	total brake 90
57401H120-125D020TPSP	125	2x20	43	143	12.5	total brake 125



Foroll Industrial Castor

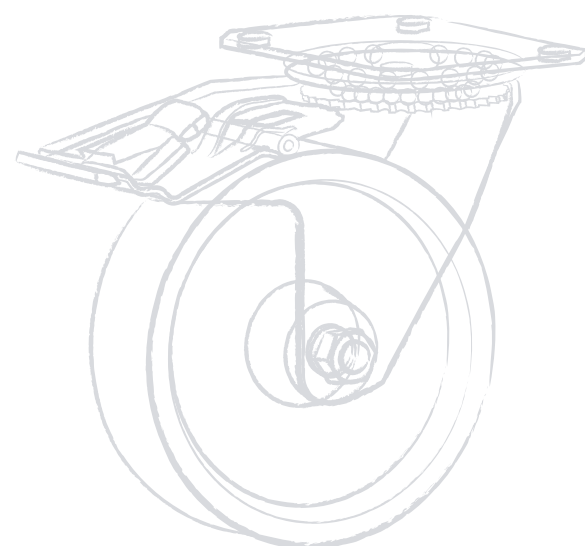

CR Series



Housing:

pressed steel, zinc plated, double ball bearing swivel head, with or without side brake.

Wheel:

non-marking black, of solid rubber, with plain bearing, low rolling resistance, impact proof and corrosive resistant.

Art--No.	⌀	+	+	⊖	KG	bearing type
050X020YSNN	50	20	24	6	30	
064X020YSNN	64	20	24	6	35	
075X020YSNN	75	20	24	6	40	
100X020YSNN	100	20	30	6	50	

Swivel Castor

Art--No.	⌀	+	⬆	⬆	⬆	⬆	⬆	⬆	KG
13026Q380--050S020YSNN	50	20	19	66.5	8x38	--	--	--	30
13026Q380--064S020YSNN	64	20	24	80	8x38	--	--	--	35
13026Q380--075S020YSNN	75	20	26	95	8x38	--	--	--	40

Swivel Castor with Side Brake

Art--No.	⌀	+	⬆	⬆	⬆	⬆	⬆	⬆	KG
13226Q380--050S020YSNN	50	20	19	66.5	8x38	--	--	--	30
13226Q380--064S020YSNN	64	20	24	80	8x38	--	--	--	35
13226Q380--075S020YSNN	75	20	26	95	8x38	--	--	--	40

Swivel Castor

Art--No.	⌀	+	⬆	⬆	⬆	⬆	⬆	⬆	KG
13026P530--050S020YSNN	50	20	19	66.5	--	51x31	40x20	5.5	30
13026P530--064S020YSNN	64	20	24	80	--	51x31	40x20	5.5	35
13026P530--075S020YSNN	75	20	26	95	--	51x31	40x20	5.5	40
13026P970--100S020YSNN	100	20	32	121	--	95x70	75x45	8	50

Swivel Castor with Side Brake

Art--No.	⌀	+	⬆	⬆	⬆	⬆	⬆	⬆	KG
13226P530--050S020YSNN	50	20	19	66.5	--	51x31	40x20	5.5	30
13226P530--064S020YSNN	64	20	24	80	--	51x31	40x20	5.5	35
13226P530--075S020YSNN	75	20	26	95	--	51x31	40x20	5.5	40
13226P970--100S020YSNN	100	20	32	121	--	95x70	75x45	8	50



GF Series




Housing:

pressed steel, zinc plated, double ball bearing swivel head with hardened ball race, with dust cap, with or without side brake.

Wheel:

high quality polypropylene copolymer wheel centre, non-marking polyurethane tread, with precision ball bearing, plastic threadguards, high abrasion resistance, low rolling resistance, impact proof and corrosive resistant.

RSA Series



Housing:

pressed steel, zinc plated, double ball bearing swivel head, with or without total brake.

Wheel:

nature polyamide, with plain bearing, high abrasion resistance, low rolling resistance, impact proof and corrosive resistant.

Art--No.						bearing type
075X032UPBP	75	32	42	10	100	
100X032UPBP	100	32	42	10	114	
125X032UPBP	125	32	42	10	120	

Swivel Castor

Art--No.								
24027P961--075S032UPB	75	32	33	103.5	92x60.5	70x44.5	9	100
24027P961--100S032UPB	100	32	33	130.5	92x60.5	70x44.5	9	114
24027P961--125S032UPB	125	32	36	158	92x60.5	70x44.5	9	120

Swivel Castor with Side Brake

Art--No.								
24327P961--075S032UPB	75	32	33	103.5	92x60.5	70x44.5	9	100
24327P961--100S032UPB	100	32	33	130.5	92x60.5	70x44.5	9	114
24327P961--125S032UPB	125	32	36	158	92x60.5	70x44.5	9	120

Rigid Castor

Art--No.								
20027P961--075S032UPB	75	32	--	103.5	92x60.5	70x44.5	9	100
20027P961--100S032UPB	100	32	--	130.5	92x60.5	70x44.5	9	114
20027P961--125S032UPB	125	32	-	158	92x60.5	70x44.5	9	120

Art--No.						bearing type
080X030YAPN	80	30	40	12	150	
100X035YAPN	100	35	40	12	180	
125X040YAPN	125	40	50	15	210	
160X045YAPN	160	45	60	20	300	
200X045YAPN	200	45	60	20	350	

Art--No.									
24028H121--080S030 APN	80	30	36	99	12	--	-	-	150
24028H121--100S035 APN	100	35	40	127	12	--	--	--	180
24028H121--125S040 APN	125	40	40	153.5	12	-	-	-	210
24028H121--160S045 APN	160	45	61.5	185	12	-	-	-	300
24028H121--200S045 APN	200	45	61.5	230	12	--	-	-	350


Art--No.									
24428H121--080S030 APN	80	30	36	99	12	--	-	-	total brake 150
24428H121--100S035 APN	100	35	40	127	12	--	--	--	total brake 180
24428H121--125S040 APN	125	40	40	153.5	12	-	-	-	total brake 210
24428H121--160S045 APN	160	45	61.5	185	12	-	-	-	total brake 300
24428H121--200S045 APN	200	45	61.5	230	12	--	-	-	total brake 350

Art--No.									
24028P811--080S030 APN	80	30	36	100	-	105x80	80x60	9	150
24028P811--100S035 APN	100	35	40	128	--	105x80	80x60	9	180
24028P811--125S040 APN	125	40	40	155	-	105x80	80x60	9	210
24028P141--160S045 APN	160	45	61.5	190	-	140x110	105x80	11	300
24028P141--200S045 APN	200	45	61.5	235	-	140x110	105x80	11	350

Art--No.									
24428P811--080S030 APN	80	30	36	100	-	105x80	80x60	9	total brake 150
24428P811--100S035 APN	100	35	40	128	--	105x80	80x60	9	total brake 180
24428P811--125S040 APN	125	40	40	155	-	105x80	80x60	9	total brake 210
24428P141--160S045 APN	160	45	61.5	190	-	140x110	105x80	11	total brake 300
24428P141--200S045 APN	200	45	61.5	235	-	140x110	105x80	11	total brake 350

Art--No.									
20028P811--080S030 APN	80	30	-	100	-	105x80	80x60	9	150
20028P811--100S035 APN	100	35	--	128	--	105x80	80x60	9	180
20028P811--125S040 APN	125	40	-	155	-	105x80	80x60	9	210
20028P141--160S045 APN	160	45	-	190	-	140x110	105x80	11	300
20028P141--200S045 APN	200	45	-	235	-	140x110	105x80	11	350

RSAR Series



Housing:

pressed steel, zinc plated, double ball bearing swivel head, with or without total brake.

Wheel:

nature polyamide, with roller bearing, high abrasion resistance, low rolling resistance, impact proof and corrosive resistant.

Art--No.						bearing type
080X030YARN	80	30	40	12	150	
100X035YARN	100	35	40	12	180	
125X040YARN	125	40	50	15	210	
160X045YARN	160	45	60	20	300	
200X045YARN	200	45	60	20	350	

Art--No.										
24028H121--080S030 ARN	80	30	36	99	12	--	-	-	-	150
24028H121--100S035 ARN	100	35	40	127	12	--	--	--	--	180
24028H121--125S040 ARN	125	40	40	153.5	12	-	-	-	-	210
24028H121--160S045 ARN	160	45	61.5	185	12	-	-	-	-	300
24028H121--200S045 ARN	200	45	61.5	230	12	--	-	-	-	350


Art--No.										
24428H121--080S030 ARN	80	30	36	99	12	--	-	-	-	total brake 150
24428H121--100S035 ARN	100	35	40	127	12	--	--	--	--	total brake 180
24428H121--125S040 ARN	125	40	40	153.5	12	-	-	-	-	total brake 210
24428H121--160S045 ARN	160	45	61.5	185	12	-	-	-	-	total brake 300
24428H121--200S045 ARN	200	45	61.5	230	12	--	-	-	-	total brake 350

Art--No.										
24028P811--080S030 ARN	80	30	36	100	-	105x80	80x60	9	-	150
24028P811--100S035 ARN	100	35	40	128	--	105x80	80x60	9	--	180
24028P811--125S040 ARN	125	40	40	155	-	105x80	80x60	9	-	210
24028P141--160S045 ARN	160	45	61.5	190	-	140x110	105x80	11	-	300
24028P141--200S045 ARN	200	45	61.5	235	-	140x110	105x80	11	-	350

Art--No.									
24428P811--080S030 ARN	80	30	36	100	-	105x80	80x60	9	total brake 150
24428P811--100S035 ARN	100	35	40	128	--	105x80	80x60	9	total brake 180
24428P811--125S040 ARN	125	40	40	155	-	105x80	80x60	9	total brake 210
24428P141--160S045 ARN	160	45	61.5	190	-	140x110	105x80	11	total brake 300
24428P141--200S045 ARN	200	45	61.5	235	-	140x110	105x80	11	total brake 350

Art--No.										
20028P811--080S030 ARN	80	30	-	100	-	105x80	80x60	9	-	150
20028P811--100S035 ARN	100	35	--	128	--	105x80	80x60	9	--	180
20028P811--125S040 ARN	125	40	-	155	-	105x80	80x60	9	-	210
20028P141--160S045 ARN	160	45	-	190	-	140x110	105x80	11	-	300
20028P141--200S045 ARN	200	45	-	235	-	140x110	105x80	11	-	350

RSH Series



Housing:

pressed steel, zinc plated, double ball bearing swivel head, with or without total brake.

Wheel:

standard solid black rubber tyre, pressed steel rim, zinc plated, with roller bearing, low rolling resistance, impact proof and corrosive resistant, also available in grey rubber tyre.

Art--No.						bearing type
080X028RHRN	80	28	40	12	50	
100X028RHRN	100	28	40	12	70	
125X038RHRN	125	38	50	15	100	
160X040RHRN	160	40	60	20	135	
200X050RHRN	200	50	60	20	205	

Art--No.										
24028H121--080S028RHRN	80	28	36	99	12	--	-	-	-	50
24028H121--100S028RHRN	100	28	40	127	12	--	--	--	--	70
24028H121--125S038RHR	125	38	40	153.5	12	-	-	-	-	100
24028H121--160S040RHR	160	40	61.5	185	12	-	-	-	-	135
24028H121--200S050RHR	200	50	61.5	230	12	--	-	-	-	205

Art--No.										
24428H121--080S028RHRN	80	28	36	99	12	--	-	-	-	total brake 50
24428H121--100S028RHRN	100	28	40	127	12	--	--	--	--	total brake 70
24428H121--125S038RHR	125	38	40	153.5	12	-	-	-	-	total brake 100
24428H121--160S040RHR	160	40	61.5	185	12	-	-	-	-	total brake 135
24428H121--200S050RHRN	200	50	61.5	230	12	--	-	-	-	total brake 205

Art--No.										
24028P811--080S028RHRN	80	28	36	100	-	105x80	80x60	9	-	50
24028P811--100S028RHRN	100	28	40	128	--	105x80	80x60	9	--	70
24028P811--125S038RHR	125	38	40	155	-	105x80	80x60	9	-	100
24028P141--160S040RHR	160	40	61.5	190	-	140x110	105x80	11	-	135
24028P141--200S050RHRN	200	50	61.5	235	-	140x110	105x80	11	-	205

Art--No.									
24428P811--080S028RHRN	80	28	36	100	-	105x80	80x60	9	total brake 50
24428P811--100S028RHRN	100	28	40	128	--	105x80	80x60	9	total brake 70
24428P811--125S038RHR	125	38	40	155	-	105x80	80x60	9	total brake 100
24428P141--160S040RHR	160	40	61.5	190	-	140x110	105x80	11	total brake 135
24428P141--200S050RHRN	200	50	61.5	235	-	140x110	105x80	11	total brake 205

Art--No.										
20028P811--080S028RHRN	80	28	-	100	-	105x80	80x60	9	-	50
20028P811--100S028RHRN	100	28	--	128	--	105x80	80x60	9	--	70
20028P811--125S038RHR	125	38	-	155	-	105x80	80x60	9	-	100
20028P141--160S040RHR	160	40	-	190	-	140x110	105x80	11	-	135
20028P141--200S050RHRN	200	50	-	235	-	140x110	105x80	11	-	205


RSP Series

Housing:

pressed steel, zinc plated, double ball bearing swivel head, with or without total brake.

Wheel:

standard solid black rubber tyre, polypropylene copolymer rim, with plain bearing, low rolling resistance, impact proof and corrosive resistant, also available in grey rubber tyre.



Art--No.						bearing type
080X028RPPN	80	28	40	12	50	
100X028RPPN	100	28	40	12	70	
125X038RPPN	125	38	50	15	100	
160X040RPPN	160	40	60	20	135	
200X050RPPN	200	50	60	20	205	

Art--No.										
24028H121--080S028RPPN	80	28	36	99	12	--	-	-	-	50
24028H121--100S028RPPN	100	28	40	127	12	--	--	--	--	70
24028H121--125S038RPP	125	38	40	153.5	12	-	-	-	-	100
24028H121--160S040RPP	160	40	61.5	185	12	-	-	-	-	135
24028H121--200S050RPP	200	50	61.5	230	12	--	-	-	-	205

Art--No.										
24428H121--080S028RPPN	80	28	36	99	12	--	-	-	total brake	50
24428H121--100S028RPPN	100	28	40	127	12	--	--	--	total brake	70
24428H121--125S038RPP	125	38	40	153.5	12	-	-	-	total brake	100
24428H121--160S040RPP	160	40	61.5	185	12	-	-	-	total brake	135
24428H121--200S050RPPN	200	50	61.5	230	12	--	-	-	total brake	205

Art--No.										
24028P811--080S028RPPN	80	28	36	100	-	105x80	80x60	9	-	50
24028P811--100S028RPPN	100	28	40	128	--	105x80	80x60	9	--	70
24028P811--125S038RPP	125	38	40	155	-	105x80	80x60	9	-	100
24028P141--160S040RPP	160	40	61.5	190	-	140x110	105x80	11	-	135
24028P141--200S050RPPN	200	50	61.5	235	-	140x110	105x80	11	-	205

Art--No.										
24428P811--080S028RPPN	80	28	36	100	-	105x80	80x60	9	total brake	50
24428P811--100S028RPPN	100	28	40	128	--	105x80	80x60	9	total brake	70
24428P811--125S038RPP	125	38	40	155	-	105x80	80x60	9	total brake	100
24428P141--160S040RPP	160	40	61.5	190	-	140x110	105x80	11	total brake	135
24428P141--200S050RPPN	200	50	61.5	235	-	140x110	105x80	11	total brake	205

Art--No.										
20028P811--080S028RPPN	80	28	-	100	-	105x80	80x60	9	-	50
20028P811--100S028RPPN	100	28	--	128	--	105x80	80x60	9	--	70
20028P811--125S038RPP	125	38	-	155	-	105x80	80x60	9	-	100
20028P141--160S040RPP	160	40	-	190	-	140x110	105x80	11	-	135
20028P141--200S050RPPN	200	50	-	235	-	140x110	105x80	11	-	205


RSPR Series

Housing:

pressed steel, zinc plated, double ball bearing swivel head, with or without total brake.

Wheel:

standard solid black rubber tyre, polypropylene copolymer rim, with roller bearing, low rolling resistance, impact proof and corrosive resistant, also available in grey rubber tyre.



Art--No.						bearing type
080X028RPRN	80	28	40	12	50	
100X028RPRN	100	28	40	12	70	
125X038RPRN	125	38	50	15	100	
160X040RPRN	160	40	60	20	135	
200X050RPRN	200	50	60	20	205	

Art--No.										
24028H121--080S028RPRN	80	28	36	99	12	--	-	-	-	50
24028H121--100S028RPRN	100	28	40	127	12	--	--	--	--	70
24028H121--125S038RPR	125	38	40	153.5	12	-	-	-	-	100
24028H121--160S040RPR	160	40	61.5	185	12	-	-	-	-	135
24028H121--200S050RPR	200	50	61.5	230	12	--	-	-	-	205

Art--No.										
24428H121--080S028RPRN	80	28	36	99	-	--	-	-	total brake	50
24428H121--100S028RPRN	100	28	40	127	--	--	--	--	total brake	70
24428H121--125S038RPR	125	38	40	153.5	-	-	-	-	total brake	100
24428H121--160S040RPR	160	40	61.5	185	-	-	-	-	total brake	135
24428H121--200S050RPRN	200	50	61.5	230	-	--	-	-	total brake	205

Art--No.										
24028P811--080S028RPRN	80	28	36	100	-	105x80	80x60	9	-	50
24028P811--100S028RPRN	100	28	40	128	--	105x80	80x60	9	--	70
24028P811--125S038RPR	125	38	40	155	-	105x80	80x60	9	-	100
24028P141--160S040RPR	160	40	61.5	190	-	140x110	105x80	11	-	135
24028P141--200S050RPRN	200	50	61.5	235	-	140x110	105x80	11	-	205

Art--No.										
24428P811--080S028RPRN	80	28	36	100	-	105x80	80x60	9	total brake	50
24428P811--100S028RPRN	100	28	40	128	--	105x80	80x60	9	total brake	70
24428P811--125S038RPR	125	38	40	155	-	105x80	80x60	9	total brake	100
24428P141--160S040RPR	160	40	61.5	190	-	140x110	105x80	11	total brake	135
24428P141--200S050RPRN	200	50	61.5	235	-	140x110	105x80	11	total brake	205

Art--No.										
20028P811--080S028RPRN	80	28	-	100	-	105x80	80x60	9	-	50
20028P811--100S028RPRN	100	28	--	128	--	105x80	80x60	9	--	70
20028P811--125S038RPR	125	38	-	155	-	105x80	80x60	9	-	100
20028P141--160S040RPR	160	40	-	190	-	140x110	105x80	11	-	135
20028P141--200S050RPRN	200	50	-	235	-	140x110	105x80	11	-	205


RSE Series

Housing:

pressed steel, zinc plated, double ball bearing swivel head, with or without total brake.

Wheel:

super elastic rubber tread, high quality polyamide wheel centre, with roller bearing, low rolling resistance, impact proof and corrosive resistant.



Art.-No.						bearing type
080X035EARN	80	35	40	12	100	
100X035EARN	100	35	40	12	150	
125X036EARN	125	36	50	15	200	
160X050EARN	160	50	60	20	350	
200X050EARN	200	50	60	20	400	

Art.-No.										
24028H121--080S035EARN	80	35	36	99	12	--	-	-	-	100
24028H121--100S035EARN	100	35	40	127	12	--	--	--	--	150
24028H121--125S036EAR	125	36	40	153.5	12	-	-	-	-	200
24028H121--160S050EAR	160	50	61.5	185	12	-	-	-	-	350
24028H121--200S050EAR	200	50	61.5	230	12	--	-	-	-	400

Art.-No.										
24428H121--080S035EARN	80	35	36	99	12	--	-	-	total brake	100
24428H121--100S035EARN	100	35	40	127	12	--	--	--	total brake	150
24428H121--125S036EAR	125	36	40	153.5	12	-	-	-	total brake	200
24428H121--160S050EAR	160	50	61.5	185	12	-	-	-	total brake	350
24428H121--200S050EARN	200	50	61.5	230	12	--	-	-	total brake	400

Art.-No.										
24028P811--080S035EARN	80	35	36	100	-	105x80	80x60	9	-	100
24028P811--100S035EARN	100	35	40	128	--	105x80	80x60	9	--	150
24028P811--125S036EAR	125	36	40	155	-	105x80	80x60	9	-	200
24028P141--160S050EAR	160	50	61.5	190	-	140x110	105x80	11	-	350
24028P141--200S050EARN	200	50	61.5	235	-	140x110	105x80	11	-	400

Art.-No.										
24428P811--080S035EARN	80	35	36	100	-	105x80	80x60	9	total brake	100
24428P811--100S035EARN	100	35	40	128	--	105x80	80x60	9	total brake	150
24428P811--125S036EAR	125	36	40	155	-	105x80	80x60	9	total brake	200
24428P141--160S050EAR	160	50	61.5	190	-	140x110	105x80	11	total brake	350
24428P141--200S050EARN	200	50	61.5	235	-	140x110	105x80	11	total brake	400

Art.-No.										
20028P811--080S035EARN	80	35	-	100	-	105x80	80x60	9	-	100
20028P811--100S035EARN	100	35	--	128	--	105x80	80x60	9	--	150
20028P811--125S036EAR	125	36	-	155	-	105x80	80x60	9	-	200
20028P141--160S050EAR	160	50	-	190	-	140x110	105x80	11	-	350
20028P141--200S050EARN	200	50	-	235	-	140x110	105x80	11	-	400


RSL Series

Housing:

pressed steel, zinc plated, double ball bearing swivel head, with or without total brake.

Wheel:

super elastic rubber tread, aluminium wheel centre, with 2 pieces precision ball bearings on both side, low rolling resistance, impact proof and corrosive resistant.



Art.-No.						bearing type
100X040ELSN	100	40	40	12	180	
125X040ELSN	125	40	50	15	180	
160X050ELSN	160	50	60	20	350	
200X050ELSN	200	50	60	20	400	

Art.-No.										
24028H121--100S040ELSN	100	40	40	127	12	--	-	-	-	180
24028H121--125S040ELSN	125	40	40	153.5	12	--	--	--	--	180
24028H121--160S050ELS	160	50	61.5	185	12	-	-	-	-	350
24028H121--200S050ELS	200	50	61.5	230	12	--	-	-	-	400

Art.-No.										
24428H121--100S040ELSN	100	40	40	127	12	--	-	-	total brake	180
24428H121--125S040ELSN	125	40	40	153.5	12	--	--	--	total brake	180
24428H121--160S050ELS	160	50	61.5	185	12	-	-	-	total brake	350
24428H121--200S050ELSN	200	50	61.5	230	12	-	-	-	total brake	400


Art.-No.										
24028P811--100S040ELSN	100	40	40	128	-	105x80	80x60	9	-	180
24028P811--125S040ELSN	125	40	40	155	--	105x80	80x60	9	--	180
24028P141--160S050ELS	160	50	61.5	190	-	140x110	105x80	11	-	350
24028P141--200S050ELSN	200	50	61.5	235	-	140x110	105x80	11	-	400

Art.-No.										
24428P811--100S040ELSN	100	40	40	128	-	105x80	80x60	9	total brake	180
24428P811--125S040ELSN	125	40	40	155	--	105x80	80x60	9	total brake	180
24428P141--160S050ELS	160	50	61.5	190	-	140x110	105x80	11	total brake	350
24428P141--200S050ELSN	200	50	61.5	235	-	140x110	105x80	11	total brake	400


Art.-No.										
20028P811--100S040ELSN	100	40	-	128	-	105x80	80x60	9	-	180
20028P811--125S040ELSN	125	40	--	155	--	105x80	80x60	9	--	180
20028P141--160S050ELS	160	50	-	190	-	140x110	105x80	11	-	350
20028P141--200S050ELSN	200	50	-	235	-	140x110	105x80	11	-	400



Foroll Heavy Duty Castor

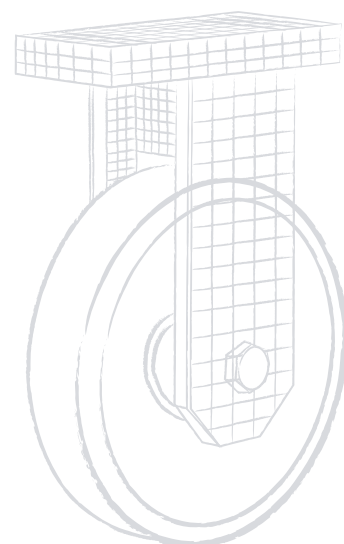

SHC Series



Housing:

solid steel welded construction, zinc plated, double ball bearing swivel head fitted with grease nipple, strong central king pin, bolted and secured, with or without side brake.

Wheel:


grey cast iron, with roller bearing, high abrasion resistance, low rolling resistance.

Art-No.	Ø	1	2	3	KG	bearing type
100X050YITN	100	50	55.5	19	400	
125X050YITN	125	50	55.5	19	420	
150X050YITN	150	50	55.5	19	440	
200X050YITN	200	50	55.5	19	460	
250X050YITN	250	50	55.5	19	480	


Art-No.	Ø	1	2	3	4	5	6	7	8	KG
35025P142-100S050YITN	100	50	31	142	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	-	-	400
35025P142-125S050YITN	125	50	34	164	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	-	-	420
35025P142-150S050YITN	150	50	40	190	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	-	-	440
35025P142-200S050YITN	200	50	51	240	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	-	-	460
35025P142-250S050YITN	250	50	65	317	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	-	-	480

Art-No.	Ø	1	2	3	4	5	6	7	8	KG
35225P142-100S050YITN	100	50	31	142	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	side brake	-	400
35225P142-125S050YITN	125	50	34	164	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	side brake	-	420
35225P142-150S050YITN	150	50	40	190	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	side brake	-	440
35225P142-200S050YITN	200	50	51	240	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	side brake	-	460
35225P142-250S050YITN	250	50	65	317	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	side brake	-	480

Art-No.	Ø	1	2	3	4	5	6	7	8	KG
30025P142-100S050YITN	100	50	-	142	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	-	-	400
30025P142-125S050YITN	125	50	-	164	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	-	-	420
30025P142-150S050YITN	150	50	-	190	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	-	-	440
30025P142-200S050YITN	200	50	-	240	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	-	-	460
30025P142-250S050YITN	250	50	-	317	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	-	-	480



SHR Series



Housing:

solid steel welded construction, zinc plated, double ball bearing swivel head fitted with grease nipple, strong central king pin, bolted and secured, with or without side brake.

Wheel:

solid rubber tyre vulcanized on grey cast iron wheel centre, with roller bearing, low rolling resistance.


Art-No.						bearing type
100X050RITN	100	50	55.5	19	350	
125X050RITN	125	50	55.5	19	370	
150X050RITN	150	50	55.5	19	390	
200X050RITN	200	50	55.5	19	410	
250X050RITN	250	50	55.5	19	430	

Art-No.									
35025P142-100S050RITN	100	50	31	142	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	-	350
35025P142-125S050RITN	125	50	34	164	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	-	370
35025P142-150S050RITN	150	50	40	190	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	-	390
35025P142-200S050RITN	200	50	51	240	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	-	410
35025P142-250S050RITN	250	50	65	317	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	-	430

Art-No.									
35225P142-100S050RITN	100	50	31	142	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	side brake	350
35225P142-125S050RITN	125	50	34	164	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	side brake	370
35225P142-150S050RITN	150	50	40	190	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	side brake	390
35225P142-200S050RITN	200	50	51	240	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	side brake	410
35225P142-250S050RITN	250	50	65	317	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	side brake	430

Art-No.									
30025P142-100S050RITN	100	50	-	142	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	-	350
30025P142-125S050RITN	125	50	-	164	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	-	370
30025P142-150S050RITN	150	50	-	190	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	-	390
30025P142-200S050RITN	200	50	-	240	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	-	410
30025P142-250S050RITN	250	50	-	317	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	-	430

SHP Series



Housing:

solid steel welded construction, zinc plated, double ball bearing swivel head fitted with grease nipple, strong central king pin, bolted and secured, with or without side brake.

Wheel:

phenolic resin, with roller bearing, low rolling resistance, able to withstand continuously temperature ab to +250°C

Art-No.						bearing type
100X050YJTN	100	50	55.5	19	350	
125X050YJTN	125	50	55.5	19	370	
150X050YJTN	150	50	55.5	19	390	
200X050YJTN	200	50	55.5	19	410	
250X050YJTN	250	50	55.5	19	430	

Art-No.									
35025P142-100S050YJTN	100	50	31	142	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	-	350
35025P142-125S050YJTN	125	50	34	164	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	-	370
35025P142-150S050YJTN	150	50	40	190	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	-	390
35025P142-200S050YJTN	200	50	51	240	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	-	410
35025P142-250S050YJTN	250	50	65	317	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	-	430


Art-No.									
35225P142-100S050YJTN	100	50	31	142	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	side brake	350
35225P142-125S050YJTN	125	50	34	164	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	side brake	370
35225P142-150S050YJTN	150	50	40	190	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	side brake	390
35225P142-200S050YJTN	200	50	51	240	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	side brake	410
35225P142-250S050YJTN	250	50	65	317	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	side brake	430

Art-No.									
30025P142-100S050YJTN	100	50	-	142	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	-	350
30025P142-125S050YJTN	125	50	-	164	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	-	370
30025P142-150S050YJTN	150	50	-	190	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	-	390
30025P142-200S050YJTN	200	50	-	240	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	-	410
30025P142-250S050YJTN	250	50	-	317	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	-	430

FURNITURE / CHAIR / APPARATUS / SHOPPING TROLLEY / MEDICAL / INDUSTRIAL / HEAVY DUTY

FURNITURE / CHAIR / APPARATUS / SHOPPING TROLLEY / MEDICAL / INDUSTRIAL / HEAVY DUTY

SHUP Series



Housing:

solid steel welded construction, zinc plated, double ball bearing swivel head fitted with grease nipple, strong central king pin, bolted and secured, with or without side brake.

Wheel:

high quality polypropylene copolymer wheel centre, PU tread, with roller bearing, high abrasion resistance, low rolling resistance.


Art-No.						bearing type
100X050UPTN	100	50	55.5	19	150	
125X050UPTN	125	50	55.5	19	200	
150X050UPTN	150	50	55.5	19	250	
200X050UPTN	200	50	55.5	19	300	
250X050UPTN	250	50	55.5	19	350	

Art-No.									
35025P142-100S050UPTN	100	50	31	142	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	-	150
35025P142-125S050UPTN	125	50	34	164	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	-	200
35025P142-150S050UPTN	150	50	40	190	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	-	250
35025P142-200S050UPTN	200	50	51	240	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	-	300
35025P142-250S050UPTN	250	50	65	317	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	-	350

Art-No.									
35225P142-100S050UPTN	100	50	31	142	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	side brake	150
35225P142-125S050UPTN	125	50	34	164	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	side brake	200
35225P142-150S050UPTN	150	50	40	190	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	side brake	250
35225P142-200S050UPTN	200	50	51	240	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	side brake	300
35225P142-250S050UPTN	250	50	65	317	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	side brake	350

Art-No.									
30025P142-100S050UPTN	100	50	-	142	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	-	150
30025P142-125S050UPTN	125	50	-	164	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	-	200
30025P142-150S050UPTN	150	50	-	190	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	-	250
30025P142-200S050UPTN	200	50	-	240	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	-	300
30025P142-250S050UPTN	250	50	-	317	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	-	350

SHUI Series



Housing:

solid steel welded construction, zinc plated, double ball bearing swivel head fitted with grease nipple, strong central king pin, bolted and secured, with or without side brake.

Wheel:

high quality polyurethane tyre cast on grey cast iron wheel centre, with roller bearing, high abrasion resistance, low rolling resistance.


Art-No.						bearing type
100X050CITN	100	50	55.5	19	450	
125X050CITN	125	50	55.5	19	470	
150X050CITN	150	50	55.5	19	490	
200X050CITN	200	50	55.5	19	510	
250X050CITN	250	50	55.5	19	530	

Art-No.									
35025P142-100S050CITN	100	50	31	142	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	-	450
35025P142-125S050CITN	125	50	34	164	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	-	470
35025P142-150S050CITN	150	50	40	190	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	-	490
35025P142-200S050CITN	200	50	51	240	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	-	510
35025P142-250S050CITN	250	50	65	317	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	-	530

Art-No.									
35225P142-100S050CITN	100	50	31	142	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	side brake	450
35225P142-125S050CITN	125	50	34	164	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	side brake	470
35225P142-150S050CITN	150	50	40	190	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	side brake	490
35225P142-200S050CITN	200	50	51	240	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	side brake	510
35225P142-250S050CITN	250	50	65	317	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	side brake	530

Art-No.									
30025P142-100S050CITN	100	50	-	142	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	-	450
30025P142-125S050CITN	125	50	-	164	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	-	470
30025P142-150S050CITN	150	50	-	190	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	-	490
30025P142-200S050CITN	200	50	-	240	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	-	510
30025P142-250S050CITN	250	50	-	317	114x101	$\frac{92}{76.2} \times \frac{66}{76.2}$	11	-	530



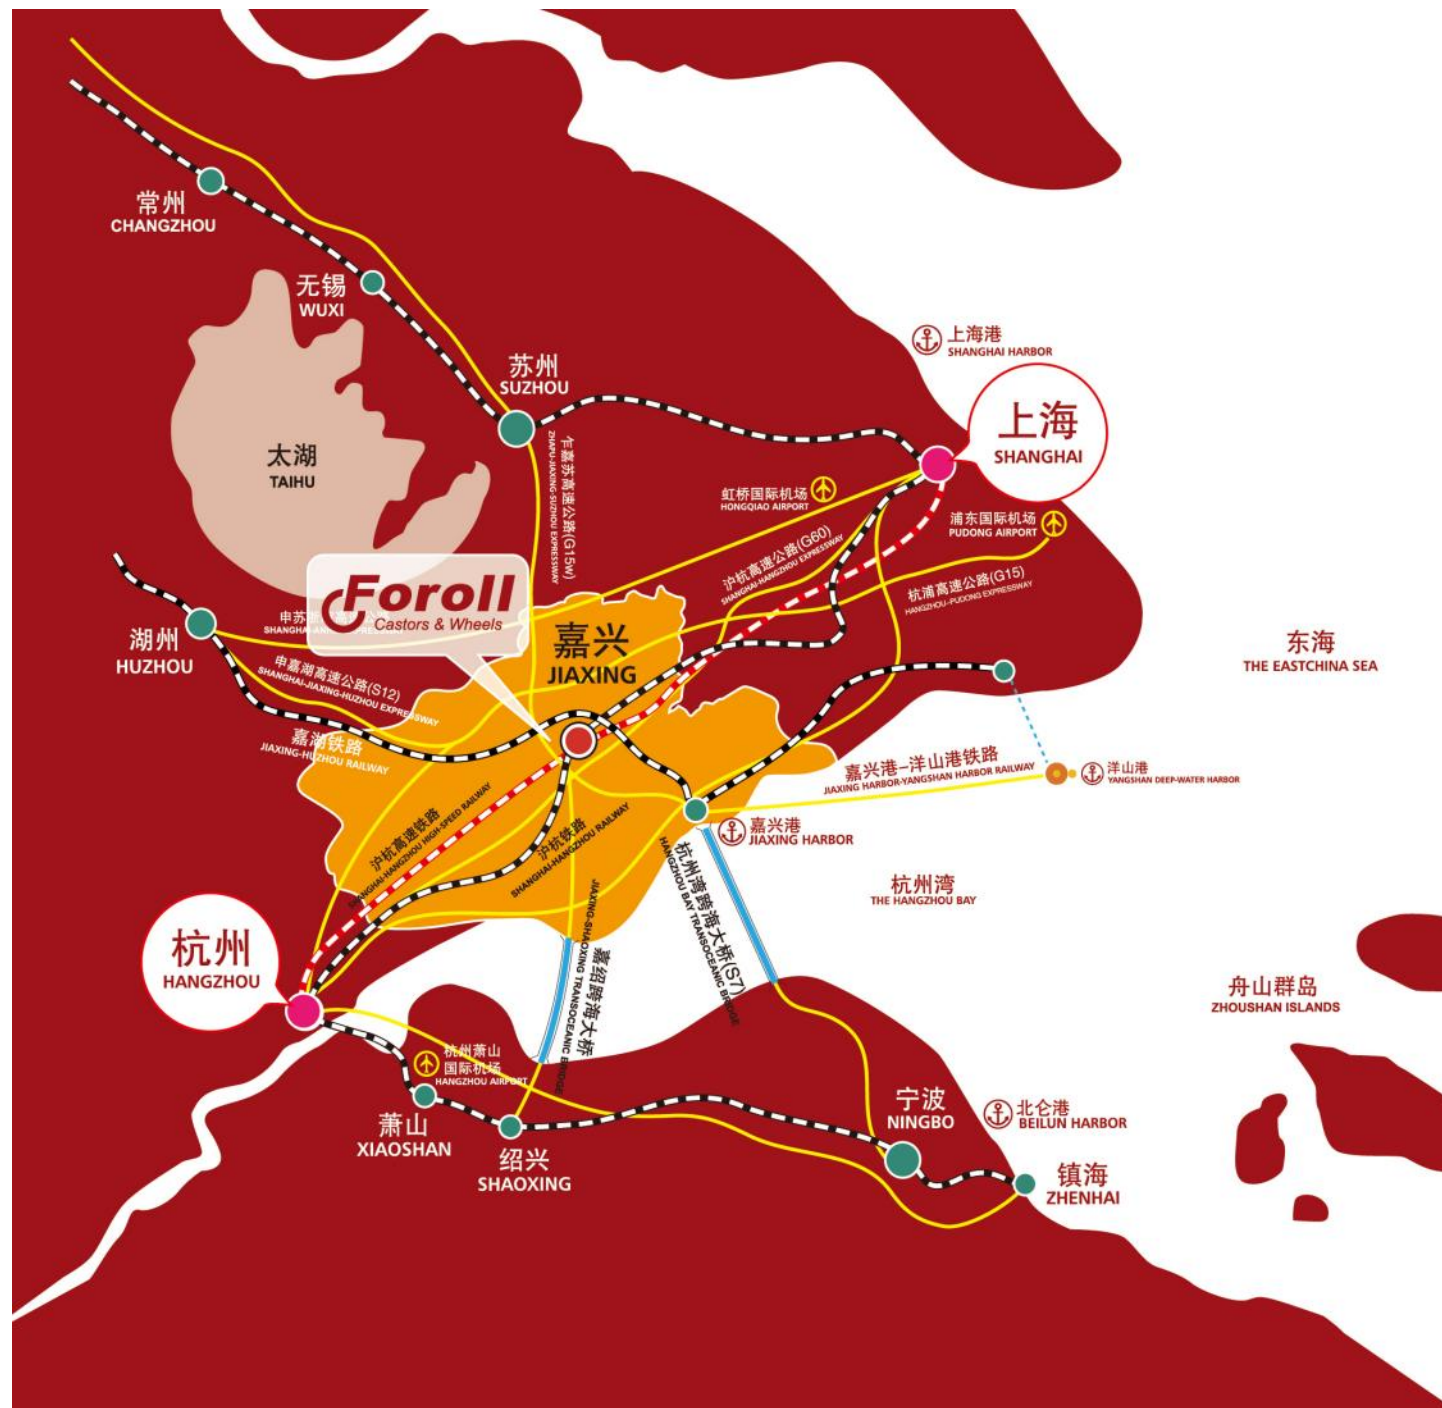

- 铁路 Railway
- - - 高速铁路 High-speed Railway
- 高速公路 Expressway
- 跨海大桥 Transoceanic Bridge

Foroll
Castors & Wheels

Add: No.718 Xiuxin Road, Xiuzhou Industial Zone, Jiaxing 314031, Zhejiang, China.
Tel: 86-573-8393-3386 Fax: 86-573-8393-3388
www.forollcastor.com Email:sales@forollcastor.com